

# Scientific American.

THE ADVOCATE OF INDUSTRY, AND JOURNAL OF SCIENTIFIC, MECHANICAL AND OTHER IMPROVEMENTS.

VOL. XIII.

NEW YORK, FEBRUARY 13, 1858.

NO. 23.

THE  
SCIENTIFIC AMERICAN,  
PUBLISHED WEEKLY

At No. 123 Fulton street, (Sun Buildings,) New York,  
BY MUNN & CO.

O. D. MUNN, S. H. WALES, A. E. BEACH.

Responsible Agents may also be found in all the principal cities and towns in the United States. Sampson Low, Son & Co., the American Booksellers, 47 Ludgate Hill, London, Eng., are the British Agents to receive subscriptions for the SCIENTIFIC AMERICAN. Single copies of the paper are on sale at the office of publication and at all the periodical stores in this city, Brooklyn and Jersey City.  
TERMS.—Two Dollars per annum.—One Dollar in advance, and the remainder in six months.  
See Prospectus on last page. No Traveling Agents employed.

## Iron Pyrites.


We have so very many specimens of this ore sent to our office with the request that we will tell the senders what it is, (many of them mistaking it for gold,) that we cannot do better than to explain the peculiarities of it, so that any person finding it may know its value, which is, comparatively speaking, nothing. It has a yellow golden appearance, due to the sulphur which it contains, and sometimes the small amount of copper present. It always occurs in a crystalline form, as cubes or double pyramids, and when cut with a knife it will be found hard, and will only slice off in one direction—that parallel to the faces of the crystal; it is very brittle, and breaks unevenly, leaving a shell-formed fracture; if it is heated, it smells strongly of sulphur, and is not at all malleable. All these characteristics show at once that it is not gold; and we would advise all those who find anything which they think is the precious metal to try these simple experiments, and if it answers the above description they need not trouble themselves any further about it. These hints are the more necessary, as it is a very common mineral, and often deceives the unwary.

## Improved Force and Lift Pump.

The improvements which are to be found in this pump are intended to supply a constant and equal stream of water in every position of the pistons, and this is effected by giving the pistons a quicker motion downward than when moving upward. The engraving represents the pump in the well with the mechanism by which it is worked on the top.

A and B are two pump cylinders connected by a water passage, C, and having pistons provided with valves opening upward. The water being drawn into A through the induction pipe, E, is passed through a small opening in the top of A into the water passage, C, and from that through another opening at the bottom into B, from which it passes to the eduction or delivery pipe, D. Each of the piston rods, a and b, has a rack, F and G, attached to it. On the top of the well is placed a frame, H, having two axles or shafts working one below the other, bearing upon it, and these carry each of them a permanent cog wheel, I and J. A handle, K, is fixed to the top axle, by which the pump is operated. The upper axle also carries two segment wheels, L and L', which are free to move around it, and each of these has a small stop or piece passing through it, kept projecting a little beyond the inner surface of L by the springs, l' l'. The cog wheel, I, gears into J, which has also a stop, j, preceded by an inclined plane, (which forms a stop to prevent the piston falling by its gravity,) and small space on its surface; and the lower arbor being placed a little more distant from the racks has

## SUTTON'S FORCE AND LIFT PUMP.

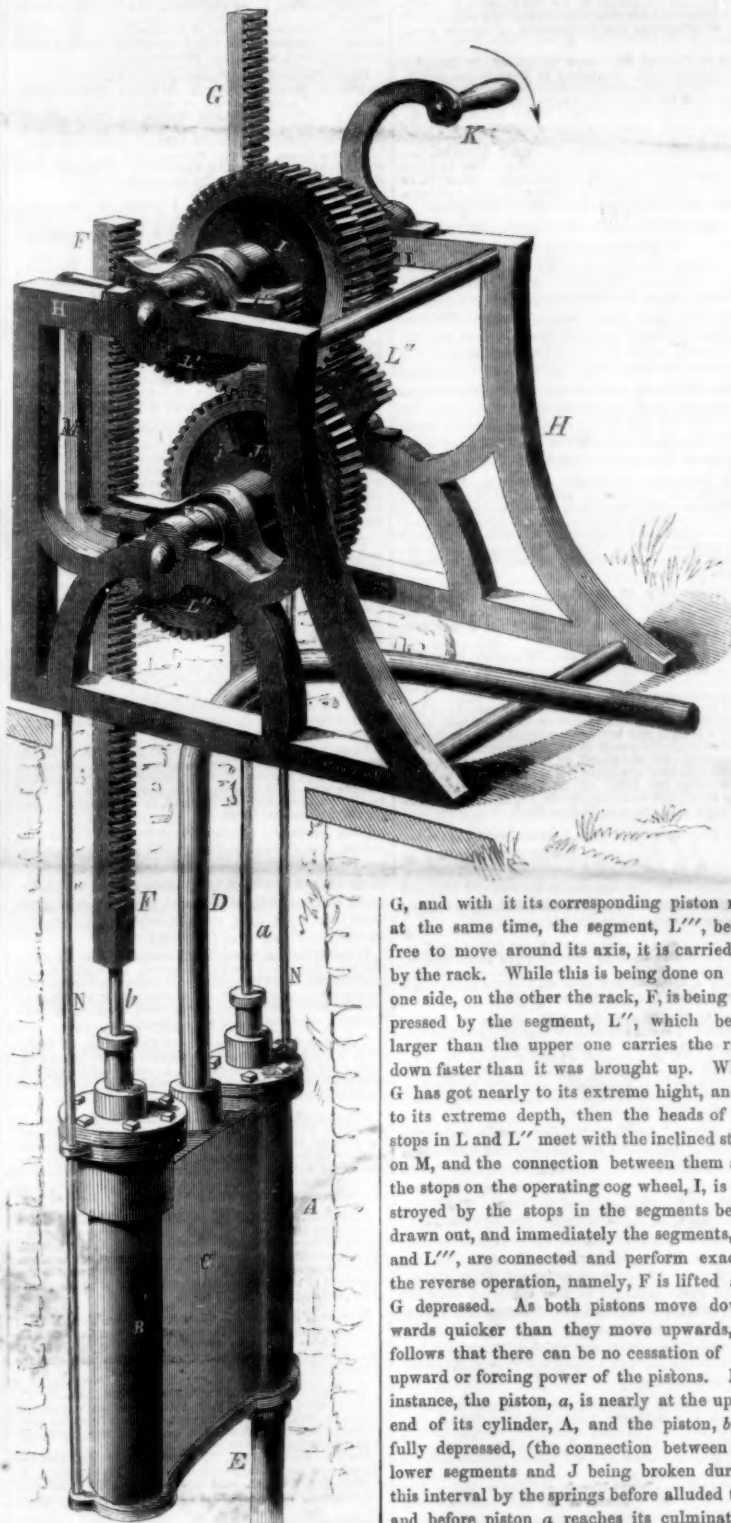

two segments, L' and L'', of larger radius than the upper ones; in other respects they are exactly similar. Upon the frame, H, are placed four inclined stops in such a position as to meet the back of the stops, l, and draw them out by their heads connected with the springs. Two of these are connected together as seen at M.

The operation of the machine is as follows: When the handle, K, is rotated in the direction shown by the arrow, the cog wheels, I and J, are turned, and by means of the stop on I, and l on L, the segment L is turned round, simultaneously elevating the rack,

G, and with it its corresponding piston rod, at the same time, the segment, L'', being free to move around its axis, it is carried up by the rack. While this is being done on the one side, on the other the rack, F, is being depressed by the segment, L', which being larger than the upper one carries the rack down faster than it was brought up. When G has got nearly to its extreme height, and F to its extreme depth, then the heads of the stops in L and L'' meet with the inclined stops on M, and the connection between them and the stops on the operating cog wheel, I, is destroyed by the stops in the segments being drawn out, and immediately the segments, L' and L'', are connected and perform exactly the reverse operation, namely, F is lifted and G depressed. As both pistons move downwards quicker than they move upwards, it follows that there can be no cessation of the upward or forcing power of the pistons. For instance, the piston, a, is nearly at the upper end of its cylinder, A, and the piston, b, is fully depressed, (the connection between the lower segments and J being broken during this interval by the springs before alluded to,) and before piston a reaches its culminating point, the piston b will ascend so that there will always be a forcing power. In consequence of this, there is no clatter of the valves, as the water never falls back on them, but is continually being drawn and forced forward. This pump is especially intended for mining purposes, where a large quantity of water is to be raised, or in any situation where it is desirable to raise water from a great depth or to a great height. The pump may be suspended from the frame at any desirable depth by the rods, N. It requires no air or vacuum chamber, as the stream is constant.

This pump is the invention of Noah Sutton,

165 Chatham street, New York, who will be happy to furnish any further information. It was patented Nov. 3, 1857.

## Electric Telegraphing by Steam.

The London Times describes a method for sending telegraph messages by steam power. All the telegraphs in use are operated by hand, either by keys like those of the piano, as in the House telegraph, or by one key, as in the Morse telegraph. The change proposed to be effected over the common slow method is stated to be a recent invention of M. Bagge, of London, and is, in substance, described by the Times as follows:—

"A series of gutta percha bands, about six inches wide, and a quarter of an inch thick, are coiled on wheels or drums arranged for the purpose. These bands are studded down both sides with a single row of holes at short intervals apart. When a message is to be sent, the clerks insert in the holes small brass pins, which, according to their combinations in twos or threes, (with blank holes between,) represent certain words or letters. In this manner the message is "set up" in the bands with great rapidity, and connected with ordinary steam machinery, by which they are drawn in regular order with the utmost rapidity, between the charged poles of an electrical machine in such a manner that, during the moment of each pin's passing, it forms electrical communication between the instrument and the telegraph, and a signal is transmitted to the other end of the wire, where the spark perforates a paper and records the message. The only limit to the rapidity of the operation is the rate at which the bands can be drawn, since the electrical contact of each pin, even for the 200th part of a second, is more than sufficient to transmit a word or signal from Great Britain and register it in America."

Old friends frequently appear with new faces, and this really appears to be the case with the above described telegraph. Excepting the use of brass pins in the holes of the bands, to break and close the circuit and for setting up the messages, the invention is, in every feature, the same as the telegraph illustrated and described on page 273, Vol. III, SCIENTIFIC AMERICAN. This telegraph had holes in the bands, the same as the one described above, but no brass pins; the holes formed the connection for closing the circuit, and according to their positions they caused dots, spaces, and dashes—as in the Morse telegraph—to be recorded. It was a telegraph as capable of being operated by a steam engine as that of the above-named gentleman, who appears to us to have bagged another person's invention.

## Statue to Jenner.

A subscription is being raised in France for the purpose of erecting a statue to the memory of the celebrated Dr. Jenner, who, it will be remembered, discovered that vaccination was a preventive of the smallpox. The most eminent physicians and surgeons of Paris are on the committee, and are working hard for their noble project. We hope they may be successful, as Jenner's discovery has done more than perhaps any other for the alleviation of one of the most dire "ills that flesh is heir to."

A LARGE PLANK.—A plank of redwood was exhibited at Philadelphia lately, which was about twelve feet long, six feet six inches wide, and two inches thick. It was perfectly "clear," with the exception of a small spot, not amounting to a knot, in one corner.





Issued from the United States Patent Office  
FOR THE WEEK ENDING FEBRUARY 2, 1883.

[Reported Officially for the Scientific American.]

**CLAIMS FOR HOLDING LADIES' HAIR IN CURLS.**—Francis Arnold, of Middle Haddam, Conn.: I claim the described device for curling the hair, consisting of a tube, A, constructed as shown, and provided with elastic straps, B, or their equivalents, for the purpose set forth.

[This invention consists in replacing the ordinary papers used by ladies to keep their hair in curl, by small metal tubes provided with an elastic band or strap to fasten it, so that it can be drawn out of the hair without in any way injuring the twist, as taking out the papers certainly does.]

**TOOL FOR MANUFACTURING SPLINT BASKETS.**—Artemus Baker, of Templeton, Mass.: I am aware that planes have been used having the edge of the iron inclined to the back of the plane, therefore I do not claim this feature alone.

But I claim the described tool, consisting essentially of the guide, E, the plate, C, and the horizontal iron, D, with its inclined edge, E, in connection with a horizontal recess, B, and opening, A, operating in the manner and for the purpose substantially as set forth.

**CARPET-STRETCHER.**—Herman Blau, of Washington, D. C.: I am aware that a carpet fork has been combined with one end of one of the legs of a pair of permanently-hinged and non-adjustable levers.

I am also aware that the legs of a carpet-stretcher have been combined with each other, by means of a movable pin and a series of holes, and therefore I do not claim such articles as my inventions.

But I claim my double extensible carpet-stretcher, composed of the combined notched bars, A and B, and the fork-armed ratchet lever, C, combined with each other, and operating substantially as set forth.

**MACHINES FOR FORMING BASKET FRAMES.**—Sewall H. Bowker, of Worcester, Mass.: I claim the row of pins, S S S, or their equivalents, substantially as described.

**JACK SCREW PRESS.**—Joseph W. Bozage, of Pine Bluff, Ark.: I claim the arrangement and combination of the follower, E, toothed rack bar, F, pinion, G, grooved pulley, I, and windlass, L, in the position and manner specified, for the purpose of rendering the follower capable of pressing upward, and self-lowering, as set forth.

Second, Giving the toothed rack bar a gradual taper on each edge, from bottom to top, so that it shall contain less metal, and require less power to raise it, substantially as set forth.

**SHINGLE MACHINE.**—David M. Boyd, of Indianapolis, Ind.: I claim the arrangement and combination of the reciprocating sliding frame, P, with the wheels, C and C', when the parts, or their equivalents, are all arranged, as a whole, substantially in the manner and for the purposes set forth.

**CULTIVATOR TEETH.**—Moses Bucklin, of Grafton, N. H.: I do not claim a seed-delivering tooth, such as is described in George W. Brown's patent, of August 24, 1882.

Neither do I claim a seed-delivering tooth, such as is described in L. W. Calver's patent, of May 29, 1883.

But I claim a cultivator tooth having two shares, which rise with a curve, so as to form semi-mold-boards, with their front edges terminating in a single perpendicular plane or cutter, and in combination with said plane or cutter, extending forward with a straight cutting-edge rising from the points of the shares at an angle of about 32°, and terminating at the top in a flange on each side, connected with the tops of the semi-mold-boards, for the purpose of fastening the tooth to the frame of the cultivator.

**MODE OF FORMING THE VAT FOR MAKING FLEET CLOTH.**—Thomas B. Butler, of Norwalk, Conn.: I do not claim the method of forming a vat of fibers deposited lengthwise, for that is open to the public; nor the method of forming a vat by alternating layers of lengthwise and transverse fibers, for that is covered by the Arnold patent referred to.

But I claim the arrangement of the machines, or their equivalents, in the manner substantially as described, operating in combination, for the purpose of forming a vat, by the interposition of a layer or silver of diagonal fibers between the alternating layers of longitudinal and transverse fibers, as set forth.

**BRICK MACHINES.**—Charles Carnell, of Philadelphia, Pa.: I claim, first, The piece, F, in two divisions, composed of three plates, and the friction pins, arranged alternately in combination with the levers, M and M', and adjustable lugs, N and N', so as to give M M', any required amount of motion.

Second, I claim, in combination with the feeding device, X X', the slip clutch, Z, and the forked rod, G, the whole constructed and operating as and for the purposes set forth.

Third, I claim, in combination with the feeding device, X X', and carriage, U, the guide, B, and revolving table, Y, for receiving the filled mold from said carriage, and delivering them at the side of the machine, the whole being constructed and operated in the manner set forth and described.

**REMOVING THE FRICTION OF JOURNALS OF AXLES ON RAILWAYS.**—L. J. P. de Mirimonde, of Paris, France. Patented in France August 24, 1882. I claim, first, Placing the bearings, d, in which the journals, e, of the friction rolls run, within the axle box, and supporting them in the shell of said box, as set forth.

I also claim, in combination with the axle or journal, f, the hanging of the friction rolls independent of each other, so that when the weight comes unequally upon them, by the rocking of the rolling stock, one shall not wrench or cramp the other, and cause it to cut, as described.

I also claim the causing of the axle itself to take and carry up the lubricator from the reservoir to the journals of the friction rollers, and supplying itself through said friction rolls, substantially as described.

I also claim in combination with the journal, f, the sectional ring, l, and solid one, m, with its flexible covering, n, carrying device for taking and conveying the oil from the reservoir to the journals of the friction rolls, as set forth.

**BREAD CUTTER.**—M. Chapman, of Greenfield, Mass.: I claim the rotating knife, G, and bed, H, placed on the shaft, B, when used in connection, and arranged relatively with the platform, A, and hopper or opening, F, so as to operate substantially as and for the purpose set forth.

[The bread-cutter which is the subject of the above claim will be of great service in hotels, and places where a great amount of bread has to be cut for meals. It consists in a rotary knife and bed in connection with a stationary hopper, in which the bread is placed, and a platform, all arranged so that the bread may be cut in a rapid and perfect manner.]

**HOT AIR FURNACE.**—George Darby, of Augusta, Me.: I claim the combination of a hollow cold air auxiliary draft flue, E, two deflecting radiating plates, H H, and a pivoted perforated damper, D', all arranged and operating substantially as and for the purposes set forth.

[This improvement is designed for effecting a perfect combustion of the fuel. It consists in passing internally an open pipe from the front of the stove to the draft flue, and providing an auxiliary or indirect draft and cold air passage at the center of said pipe, and below this opening arranging two deflecting plates, for breaking up the harmony existing between the partially ignited gases arising from the fire, and thus allow of a perfect mixing of atmosphere with the same, and consequently effecting perfect combustion. This is a very simple, compact, and useful arrangement of hot air furnaces.]

**STOVES.**—Rufus Dawes, of Washington, D. C.: I claim the combination of the outer bars, e, and the inner bars, e', arranged so as to admit an air passage, g, through the fuel, and an air passage, k', between the outer bars, and the casing, b, for the purpose of supplying the inner and outer surfaces of the fuel with air, by which arrangement the combustion of smoke is effected.

**MODE OF LAYING RAILROAD TRACKS.**—F. P. Dimpfel, of Philadelphia, Pa. Patented in France October 27, 1880. I do not claim laying rails on string timbers, g, but I claim the clamping of each line of rail between two lines of string timbers into which the rails are fitted, substantially as described, so as to receive not only a lateral, but a vertical support therefrom, both at the base and head, thereby increasing the bearing surface of the rail, keeping the several lengths of rail in place at the joints and other parts, enabling a lighter rail to be used than that ordinarily employed, and making a less solid and at the same time a less flexible track.

[This invention consists in supporting and securing the rails by clamping them between two string timbers, which are properly recessed to receive them, so as to give them a vertical, as well as a lateral support, along their whole length, the vertical support being given to the head as well as to the base of the rail. This improvement effectually prevents the rails rising or sinking, or getting out of the line at the joints, without the use of chairs, or other similar bearings, and by enabling a lighter rail to be used, makes a track which is less solid, and consequently less productive of injury to the head of the rail and rolling stock, though at the same time, by the support given to the head and neck of the rail by the timbers, it is less flexible.]

**CORN PLANTERS.**—N. Drake, of Newton, N. J.: I claim, first, The agitator, g, arranged with relation to the seed boxes and valves, substantially as set forth.

Second, Combining with one of the weights which operate the valves, or its equivalent, a cam-shaped gear wheel, corresponding in form with the cams which operate said valves, substantially as and for the purposes set forth.

**WHEELWRIGHT'S MACHINE.**—Nathaniel T. Edison, of New Orleans, La.: I claim the form, or its equivalent, in combination with the press, substantially as represented and described.

**GUMMING AND JOINTING SAWS.**—Hosca O. Elmer, of Mexico, N. Y.: I do not claim the rotary bar cutter, G, placed on a reciprocating frame, or carriage, for such device has been previously used.

But I claim constructing the bed or frame, A, of two parallel bars, a a', connected at their outer or front ends by a bolt, b, and having a suitable space allowed between them, when said bed thus constructed is used in connection with the guard or guide, M, attached to its inner ends and arranged as shown, for the purpose of preventing the teeth of the saw being injured by coming in contact with the plate, J, as the bed is adjusted upon or to the saw, as described.

[This is an improvement on a former patent of the inventor, and consists in so constructing the bed or frame of the machine, and providing it with clamps, that it may be readily attached to the saw and adjusted in the proper positions, and applied with equal facility to either reciprocating or circular saws.]

**ATTACHING THE ELECTRODES TO THE POLES OF GALVANO BATTERIES.**—Joseph Elmendorf, of Penn Yan, N. Y.: I claim the method of attaching the electrodes by means of a fusible alloy composed of the ingredients and proportions substantially as specified.

**GOLD AMALGAMATOR.**—Joseph H. Fisher, of Placerville, Cal.: I claim the employment of a rotating cylinder, having its face or periphery of silver, or other suitable metal, and placed within a wheel, D, or arranged in any suitable or equivalent way, so as to receive the wash from the crusher, and unite, by amalgamation, the globules of alloy that escape with the wash from the crusher, as described.

[The object of this invention is to receive and retain the small globules of alloy (mercury and gold) which escape with the wash from gold quartz crushers. These globules are, in the aggregate, of considerable value, and hitherto have been allowed to escape. The invention consists in placing a cylinder, having a face of silver or other metal which readily amalgamates with mercury, within a wheel which is placed in a box, the face of the wheel being open, or formed of bars or slats, and the whole arranged so that the wash from the crusher is made to fall upon the silver face of the cylinder, (which is rotated slowly by gravity, by the rotation of the containing wheel), and which, of course, amalgamates with the gold and quicksilver alloy, thus separating it from the wash.]

**ROTARY STEAM ENGINE.**—Levi F. Goben, of Spring Hill, Mo.: I claim the double-branched sliding abutment, D, roller, F, flanged wheel, E', stud, t, arm, l, and oscillating valve stem, P, constructed, arranged, and operating relative to each other, substantially as specified.

**CULTIVATORS.**—James Honck, of Clinton, Ind.: I do not claim the use of shovels or the mold-board, as they have been long used.

But I claim the arrangement of the triangular mold-board, C, and its adjustable standard, B4, with relation to beam A, standards, B B B, handles, H H, and shovel, S S, in the manner and for the purpose set forth.

**DAMPER REGULATORS.**—James How and Charles W. Copeland, of Brooklyn, N. Y.: We are aware of the facts that elastic diaphragms properly connected have been used as damper for regulators; that an elastic metallic vessel, of peculiar formation, has been employed for the same purpose; and also that a bent highly elastic metallic tube has been, and now is, used as a steam gage, but in that instance the pressure does not alter the cross section of the tube, but the degree of curvature in the length of the tube. And we also know that it has been proposed to employ a coil of tube as a gasket for stuffing-box packing, such a tube being distended by fluid pressure. We therefore lay no claim to any such contrivances.

But we claim a flexible or flexible and elastic tube, closed at both ends, and in connection with a steam generator, in combination with a presser block, and a bed-plate, constructed as a whole substantially in the manner specified, and applied to regulate the quantity of air delivered to a furnace, or as a pressure indicator.

**APPARATUS FOR HOISTING ICE.**—Augustus Hunt, of Philadelphia, Pa.: I claim, first, The employment, for raising and delivering ice, of two cradles, so arranged in connection with any suitable driving apparatus, that one shall ascend simultaneously with the descent of the other, said cradles being so constructed and arranged as to retain and deliver the ice without the aid of assistants.

Second, Forming that portion of the cradle on which the ice rests with an incline, and combining that incline with the retaining and releasing levers, K and K', or their equivalents, for the purpose specified.

**GRAIN MILL.**—J. J. Johnston, of Allegheny, Pa.: I claim, first, The use of the pin, e, on the revolving bar, for the purpose of operating the bolting sieve, f, and spring rod, c, as described and set forth.

Second, The arrangement of the hopper, k, spring rod, e, hollow hub, l, and feed screw, d, as described, and for the purpose set forth.

Third, The arrangement of the recess, s, in the bars and flange, X, on the stationary bar, for the purpose of forming the gathering chamber, o, as described, and for the purpose set forth.

Fourth, The arrangement, in the face of the bars, of the recesses with the blank space marked S, in connection with the arrangement of the teeth or cutters and rubbing surface, p, as described, and for the purpose set forth.

Fifth, The arrangement of the spring, y, the bolting sieve, f, with the recess, l, and the cutters, s, t and r, as described, and for the purpose set forth.

**PLATE FRAMES FOR PHOTOGRAPHIC CAMERAS.**—Wm. and W. H. Lewis, of New York City: We claim the cut-off, g, of opaque glass, or equivalent material, in combination with a suitable spring, by which said cut-off is made to close the aperture through which the slide passes, substantially as and for the purposes specified. We also claim securing the corners, c, of glass, or equivalent material, into the frame, by means of the rib and groove, substantially as specified.

**CORN SHUKLER.**—Joseph R. Lindner, of Cincinnati, Ohio: I claim the elastic case, G, constructed as set forth in the described combination with the concave, C, and drum, A, as described.

**INVALID BEDSTEAD.**—George Miller, of Fremont, Ohio: I claim the three frames, A B C, in combination with longitudinal pieces, F, connecting pieces, G, secondary frame, H, springs, S, and drawing mechanism, constructed, arranged and operating as set forth. I also claim, in combination with the foot-piece of the bed, the roller, K', and plate, P, attached thereto, operating as and for the purpose set forth.

**HIMP BRAKES.**—Solomon P. Moore, of Arrow Rock, Mo.: I do not claim any of the improvements embodied in the machine for which a patent was granted to S. A. Clements, in 1883.

I do claim so constructing the contiguous faces of the brakes in a transverse direction to the general line of the feed and general line of the longitudinal surfaces of said brakes, as to prevent the fibers or stalks from escaping the proper action of the machine by a change of direction, when combined with the brakes vibrating in relation to each other, substantially as described and shown.

**TORACON PRESS.**—W. R. Musser, of Baltimore, Md., and John Coleman, of Lynchburg, Va.: We claim the application of the levers, A and U, the sheaths over which the chain passes, said chain being connected to the end of lever U, the braces, K K', to retain the pressure, and the mangle truck, passing under the press. Also the combination of the whole as a new and useful machine for mechanical purposes, substantially as set forth.

**WASHING MACHINE.**—W. W. Neal, of Yellow Springs, Ohio: I claim the arrangement and combination of the rubber, G, connecting bar, E, crank, D, yielding standard, n, or its equivalent, and yielding suspending rods, H H, substantially in the manner and for the purposes described.

**FLARES FOR CARTING WHEELS.**—F. Nishwitz, of Brooklyn, N. Y.: I claim the employment of guides or sockets, C D, of metal or wood, attached to the flask to receive and hold the shaft or axle within the sand mold, independently of the sand, substantially as and for the purpose set forth.

[This invention consists in providing the flask with guides or sockets of metal or wood of a proper size to receive the shaft snugly within them, and properly arranged to hold the shaft in its proper place within the mold independently of the sand, thereby enabling the mold to be made more expeditiously, and the wheel to be cast more truly upon the shaft.]

**HARROWS.**—S. J. Orange, of Graysville, Ill.: I claim the combination of the two harrows, A, with the connecting bar, K, or its equivalent, when the harrows are so arranged as to produce by their connection with it, and thereby with each other, a continued rotation of both harrows, substantially as set forth.

**RAILROAD CAR BRAKES.**—Nathaniel Potter, of Hillsdale, Mo.: I claim the combination of the balls, l m, and stops, h, l, with chains, H I, and "oscillator," F, arranged and operating substantially in the manner and for the purpose set forth.

**MAKING RAILWAY RAILS.**—Thomas E. Purchase, of Reading, Pa.: I claim the manufacture of railroad rails from a pile, the top bar of which is of a superior quality of iron, immovable laterally, and sufficiently heavy to give the rail, when rolled a consolidated head, connecting with the lower layers in the stem of the rail, substantially as set forth.

**PLOWS.**—J. O. Ramage, of Lafayette, Ala.: I claim connecting the piece, R, with the stock by point and cavity as shown at a, and passing a bolt on the bottom of the same through opening i, and the slot of the plow-point, whereby the said piece is made to perform the functions of rock-cutting, brace, and sealer of the plow-point, substantially as set forth.

**SAFETY WINCH.**—Wm. Ricker, of Penn Yan, N. Y.: I claim the means used to operate the pawls, D and D', substantially as above specified, also the ratchets, C, and C', when used in combination with the devices mentioned.

**ADJUSTABLE AXLE BEAR FOR CARRIAGES.**—F. O. Rogers, of Elmira, N. Y.: I do not claim, in general terms, the adjustment of a brace, to adapt it to the contractions and expansions of a carriage spring by hanging it to a vibrating arm or lever.

But I claim the lever, E, when constructed and arranged and operating in combination with the body, A, springs, B B, axle, C, and braces, D D, of the carriage, substantially in the manner and for the purpose specified.

**SAW GUINER.**—N. F. Stone and W. C. Ward, of Menard county, Ill.: We claim so combining the levers, screw clamp, butt, and clamping disks in one machine, so that the operator may keep the butt up to the saw plate, whilst the apparatus is clamped thereto, as set forth and explained.

**LAMP.**—John Stuber and Richard Hughes, of Utica, N. Y.: We claim so constructing and arranging the upper half of the feed pipe, j, of a spring or mechanical lamp, so that the lower half will be free to slide to the top, or nearly so, of the wick tube for the purpose of lessening the height of the latter, and of rendering the lamp more compact, substantially as set forth.

Secondly, The arrangement and combination of the elastic strip, p, pin, q, and slot, y, with the rods, t, and loops, u, the whole being constructed and operated in the manner substantially as set forth, for the purpose of forming an elastic piston for a lamp.

**FASTENING FOR WINDOW SHADERS.**—Francis Thrasher and H. B. Horton, of Akron, Ohio: We claim the friction strip, C, riding upon an inclined plane, and operated by a spring so as to be self-locking for the purpose of fixing the window sash at any desired height, as set forth.

**TURNING TABLES FOR RAILWAYS.**—W. H. Ward, of Auburn, N. Y.: I claim, first, The combination of the turning platform arranged without a central pivot or its equivalent, and the grooved circular tracks, the sides of which form inclined planes sloping toward the center of the grooves, with a series of balls arranged in the grooves, whereby the platform of the table is free to yield laterally to shocks, and again assume its central position.

Second, The combination of the curbing, l, with the platform track and balls, when arranged in the manner and for the purpose described.

Third, The combination of the clamping mechanism arranged as described, with the turning platforms by which the table may be stopped in any part of its revolution, and the lateral movement gradually arrested as described.

Fourth, The combination of the clamping mechanism, with the bell cranks, and connecting rods, or their equivalents, by which all the clamps are simultaneously brought into action by either of the clamping levers.

**WATERPROOF GAITER SHOES AND BOOTS.**—Thomas C. Wales, of Dorchester, Mass.: I do not claim the vulcanizing process, nor do I claim making articles of cloth cemented together with rubber cement and afterwards vulcanizing them, nor do I claim making shoes partly of leather and partly of cloth, the same being made by connecting the leather and cloth together by waterproof caoutchouc cement, as such when made partly of leather cannot be vulcanized owing to the fact that the great heat required in the vulcanizing process injures or destroys the leather.

I claim a new or improved manufacture, or water-proof vulcanized rubber and cloth gaiter shoe, made in manner and with its external layer of cloth and its lining of cloth arranged together, and with respect to the remainder or rubber parts or foxing, substantially as specified.

**MANUFACTURING ANGULAR PAPER BOXES.**—Elisha Waters, of Troy, N. Y.: I claim the construction of angular boxes of paper board, by cutting the board into strips for the sides and pieces, for the tops and bottoms, forming the upright angles one by one, by pressing the strips between angular dies without cutting, creasing or scoring the board, and finally cementing the parts together, substantially as set forth, thus producing by the use of only a single set of the dies, and with the least wear of the paper board, any required number of different sizes of many sided boxes with smooth, solid, upright corners, as specified.

**MACHINES FOR DRAIVING GARMENTS.**—J. M. Weston, of Chesterfield, N. Y.: I claim the adjustable curved plate or arm size, 7, and index pointer, 9, in combination with bed rule, 2, and connecting rod, 5, provided with their several scales, when constructed and operating in the manner described, for the purpose specified.

**SHIFTING BELTS.**—Morris Wells, of Brooklyn, N. Y.: I claim the arrangement of the shifting bar, A, spiral spring, C, pulley, E, belt, F, and cords, D B, within and relatively to the box, B B', in the manner substantially as described, whereby the whole of the shifter is brought within a very small compass, and in such convenient form that it can be very readily attached in any convenient place.

[The shifting bar, with a spring for shifting it in one direction and a cord and pulley for drawing it in the opposite, are placed in a box, and a bolt is provided for locking the bar, which brings the entire shifter within a very small compass, and in such a convenient form that it can be attached to a beam post or any required support in a few minutes, and is immediately ready for use.]

**DRESSING MILL STONES.**—Isaac Whisen, of Mount Jackson, Va.: I claim the construction of a mill dress, having a central sloping draft circle, f f, with para-centric curves proceeding therefrom and terminating in main and branch furrows, I I S K K L, formed by the mathematical divisions, subdivisions and especial angular calculations, substantially as shown and described.

**SEED PLANTERS.**—J. H. Wiggan, of Boston, Mass.: I claim the arrangement of the seeding cylinder, h h', and toothed bar b', for planting seed automatically in the manner and for the purpose set forth.

**FEEDING THE BOLT IN SHINGLE MACHINES.**—Twentyman Wood, of Greenwich, Conn.: I claim the combination of the notched or corrugated guides, with the arms, M, or their equivalents, and an apparatus for setting the block forward to the knife, as set forth.

**MODE OF OPERATING PISTONS OF PUMPS.**—Simcoen Wood, of Worcester, Mass.: I claim the actuating of pistons by the rolling of wheels over upward projecting inclined planes, separately considered, as not embracing the full scope of my invention.

But I claim the combination of the weighted disc, D, with the system of wheels, W W W', the floor, J, and the protruding inclined planes or their equivalent, arranged and operating substantially as set forth.

**FURNACES FOR LOCOMOTIVES.**—O. W. Bayley, of Boston, assignor to the Boston Locomotive Works: I claim the water space perforated cone, as connected with the crown sheet, and in connection with a tight furnace bottom operating in the manner substantially as set forth.

**APPARATUS FOR PAYING OUT TELEGRAPHIC CABLES.**—L. Brauer (assignor to himself and L. Brandenburg, and J. B. Stewart), of Washington, D. C.: I claim the arrangement of the spring pulley frame, with the paying out apparatus and the valves of both the paying out engine and propelling engine or either of the same separately, substantially as and for the purposes set forth.

[This invention is designed to overcome the difficulty attending the laying of the telegraph cable across the ocean. It provides a spring pulley frame for supporting and weighing the draft on the cable, and receiving all sudden shocks, said frame, also, by being combined with the valves of the engine of the paying-out apparatus, and with the valves of the propelling engine, increases or cuts off the supply of steam as necessity requires, and thus controls the paying out of the cable or the speed of the steamer. This appears to be a plausible arrangement, and is worthy of attention.]

**COTTON PRESS.**—J. A. Dishrow and J. E. Cronk, (assignors to J. A. Dishrow) of Poughkeepsie, N. Y.: We are aware that windlasses have been previously used and arranged in various ways to operate the rollers of presses, but we are not aware that the windlasses, ropes, and followers have been so arranged that the ropes could protect the press box from lateral pressure, while the substance within the box, was being compressed. We do not claim, therefore, broadly, the employment or use of windlasses for operating the rollers.

But we claim the arrangement of the drums, H H, ropes, J, and follower, K, substantially as shown and described, whereby the ropes are made to serve the double function of lateral supports, and as a means for connecting the follower to the gears or driving parts. We further claim applying the power to the follower, K, substantially as shown and described, to wit, by means of the rotating press box, A, and base, R, annular rack, E, gearing, F, h, G G, in connection with the drums, H H, and ropes, J, or their equivalents.

[This cotton press has its power imparted to it by being itself rotated by horses or other means, and it being so connected by means of gearing that the ropes inside which the stuff is placed, act at once to relieve the pressure on the sides, and at the same time bring down the follower. The great improvement is in having the ropes so arranged that the usual cumbersome and very strong sides can be dispensed with, and the press is altogether more light and compact.]



**DIAPER OR SHAWL PINE.**—J. G. Klinger, of Jersey City, assignor to Ignatius Starn, of New York City: I claim the spiral shield, the stops, and friction detent, all as specifically and severally set forth.

**HARROWS.**—James Robins (assignor to himself, Danl. R. Haines and S. Richardson), of Leominster, Mass.: I do not claim a rotary wheel harrow, nor do I claim the application of a weight to the draft bar so as to rest on one side of the rotary wheel harrow, and by its pressure thereon cause the revolution of the wheel harrow while it is being drawn forward, nor do I claim a rotary wheel harrow made with its toothed rim in sections, as shown in the patent numbered 12,639, of the United States Patent.

But I claim a rotary wheel harrow as made with its toothed rim in sections adjustable with reference to the axis of the wheel, as specified, in order that the dimension of the wheel may be varied as set forth.

And with a wheel made adjustable as specified, I claim so applying the roller weight to its supporting arm, as to enable the weight to be adjusted nearer to or farther from the center of the wheel, and with reference to the adjustable rim as stated.

**PREPARING BLANKS FOR SHOE PEGS.**—B. F. Sturtevant (assignor to himself and Elmer Townsend), of Boston, Mass.: I claim the described process of making blanks for shoe pegs by sawing and gluing up the material in the manner substantially as set forth for the purpose specified.

Second, I claim the method described of securing the blanks in passages, by means of bands of adhesive paper or their equivalents, whereby the blanks may be placed in the machine, and removed therefrom in bundles as set forth.

**SEWING SILK.**—H. Kelsa, of North Branch, in Antrim, N. H., assignor to himself and Henry Dunklee, assignors to D. B. and J. C. Fuller, of New York: I do not claim a manufacture of silk twist as made by laying and twisting together three different strands. But I claim my improved manufacture of silk twist or sewing silk as made by looping and interlooping a single strand, and subsequently twisting it into one line or cord, as specified.

#### EXTENSION.

**SHIPS' BLOCKS.**—Cornelia Waterman, adm'x. of Stephen Waterman, deceased, and Isaac D. Russell, of New York City. Patented Jan. 31, 1844—Re-issued June 9, 1857—Extended Jan. 30, 1858: We claim passing the straps through grooves in the inner faces of the cheeks of the blocks, as described.

#### Wine Manufacture and Adulteration.

Wine is the oldest of stimulating beverages; when pure, it is both healthy and nutritious. Even as far back as the time of the antediluvian naturalist, Noah, its very valuable qualities were tested. The two principal wine-producing countries in the world are Austria (particularly Hungary) and France. The whole quantity of wine produced yearly in all Europe is stated to be 120 millions of eimmers, or 2,400 millions of gallons (one eimmer being equal to twenty gallons). Of this quantity Austria and France together produce 100 million eimmers, and the rest of Europe 20 millions. In good years Austria produces more than France; but generally France produces more than Austria. The consumption of wine increases every year, but its production (in a natural way) does not keep pace with the demand. It has been found by experience that thirty-three years in every century are years of failure for the wine-dresser, and only ten in every hundred are years of plenty. We may therefore imagine to what extent adulteration is carried. To illustrate this, we may mention that in the last two years less port wine has been produced in Portugal by about 30 per cent than was exported, and there was about 50 per cent more port wine consumed in England than was imported, making a total of 95 per cent spurious wine.

The most lucrative and easiest of adulterations is to convert water into wine, or to mix water with wine. Port wine is manufactured in England by adding water to very strong Cape wine, and a new fermentation is caused by yeast. Coloring substances and etheric oils are added to imitate the flavor. The same method is pursued to manufacture French and Spanish wines; raisins and currants are sometimes used, and even plums and beet-root have been discovered in spurious wines.

As the sun shines on the wicked with as much brightness as on the good, so chemistry has enabled many to adulterate, at the same time that it has taught how these adulterations may be detected; and, although, at present, we do not understand the combinations of the alcohols and ethers with essential oils, yet the time will surely come when we shall, and even to-day the experiments of the laboratory have produced from cream of tartar, sugar and fruits, seemingly good and wholesome wines. Some improvements must occasionally be made by the wine-seller, because nature does not produce every year—even on the same soil—wine of the same flavor and strength; and the wine-dealer therefore resorts to such means as will produce wine of an equable flavor. There is in Switzerland and the south of Germany a mode

of wine-improving which is called "galling the wines." There is no harm in this process, as it consists in adding lime or alumina to take off a little sourness, and in applying the white of eggs or isinglass or milk to purify it, as all these substances precipitate; but if lime or alkalies are added when the wine commences decomposing it is hurtful to the health, as chemical combinations are then formed in solutions which are unhealthy. French wines are sometimes adulterated with alum or even sulphuric acid to improve the red color. The adulterations most common are those for imparting color and flavor; the former is effected by Brazil and Campeachy wood, litmus, or citron, and the latter by nitric acetic ether.

It is a fact that, even at the present time, wines are manufactured without fresh grapes; raisins being steeped in rain or pure water, and sediments of various kinds of wines—red or white—being added to cause fermentation. These are less objectionable than the bad apples and pears and the sirup of potatoes sometimes used in making artificial wines.

Chemistry has hitherto failed to find reagents to detect such adulterations, except cider which is detected by the presence of acetic acid. The only successful detective test in the hand of an able chemist is the quantity of solid matter in wines, as there is a constancy in the quantity of solid matter in the various kinds of wines. It is only true of the natural unadulterated wine that it is "the milk for old age," a source of health, and the nectar to which the Greeks ascribed the power of imparting eternal youth and immortality to their gods.

L. R. BREISACH.

[If we would discourage adulteration, we should patronize home-grown wines rather than foreign; that is, if we drink any at all. There is no doubt that America may ultimately become a great wine-growing country, if encouragement is given to her wine-dressers, and as illustrations of this assertion we need only mention California and Ohio, two States in which first class wines have already been produced. Next week we shall have something to say about home adulterations of this beverage.]

#### Curing Back-lash in Flouring Mills.

**Messrs. Editors.**—One of the greatest difficulties in the practical working of steam flouring mills is what is termed "back-lashing," or in other words, the mill-stones, by their momentum, are carried faster than the driving gear, while the engine passes its centers, and being overtaken again, a jar is produced, also a strain on the machinery, which prevents the proper grinding of the grain, besides causing serious damage to the machinery. Many contrivances have been introduced to obviate this, such as double engines, springs, &c., but without much success. There is, however, a way of avoiding it entirely, and of securing a motion as uniform as can be desired. The principle is known in theory to all good millwrights and engineers, but in nine cases out of ten they fail to bring it out in practice. All that is necessary, is to have the fly-wheel sufficiently large and heavy, that its momentum shall exceed that of all the stones combined. No allowance should be made for the resistance of the grain under the stones, as it will sometimes happen that the feed may be shut off by accident, and the stones, being relieved from that resistance, their momentum will increase, and breakage of machinery result. I am operating a mill which is so nicely calculated in this respect that when supplied with the usual feed, a very uniform motion is obtained; but it has happened on two occasions that the supply of grain to the stones was interrupted by straws, which produced such severe back-lashing that our main driving-shaft was broken in both instances. The momentum of the fly-wheel should exceed that of the stones combined, when running light, by at least one-fifth. For this reason, engines for flouring mills should be of short stroke, to make a greater number of revolutions per minute. This will enable millers to get up the required momen-

tum in the fly-wheel without having it inconveniently large, and it will avoid the necessity of giving too much velocity to the piston.

H.

#### Magnetic Variations.

**Messrs. Editors.**—I saw in a late number of your valuable paper an article headed "Magnetic Variations," from which I infer that Mr. Samuel H. Jack, of Maryland, was somewhat surprised to find, that from actual observation, the magnetic variation at his place differed materially from that given in Mr. Loomis' "Magnetic Chart of the United States."

Now, I do not know how perfect a chart Mr. Loomis may have been able to make of the magnetic variations of the United States, but fifteen years' experience has taught me that there is absolutely very little dependence to be placed upon the magnetic needle. I have no confidence in any chart of to-day that pretends to give me the magnetic variation on the same meridian to-morrow, next week, or next year. Such are the variety of causes of magnetic variation that we are not certain of its remaining the same, even for an hour at a time, on the same meridian, much less if the needle be transferred to another meridian, no more than a mile from the first. Heat and cold, the different electrical states of the atmosphere, and the different ores in which the earth abounds, all have their effect upon a good magnetic needle. Nor do we often find two needles that will indicate precisely the same variation at the same time and on the same meridian. I have two excellent needles, and they differ to the amount of 20'.

From a series of observations which I have been making at this place since the 1st of May, 1857, I find that the average variation of the same needle, at 7 o'clock A. M., has been 3° 38' E.; at 12 M., 3° 40' E., and at 6 P. M., 3° 41' E. I find also that in the whole number of days on which observations were made, there were not more than one-fourth in which the variation stood the same all day. In some instances the variation increased 25' between morning and noon.

Such has been my experience, and such, I think, will be every man's that puts the matter to the same test. It is easily seen, therefore, how little dependence is to be placed upon the needle in making any very important survey.

C. S. WOODARD.

Michigan City, Ind., Jan. 13, 1858.

#### German Newspapers.

**Messrs. Editors.**—Your paper of January 16th contained an article stating that "there are ten times as many newspapers printed in the German language in the United States as there are in Germany." In reply to, and refutation of this, allow me to refer you to a statement translated from the *Leipzig Illustrirte Zeitung* (a paper that is, in every way, reliable,) of August 21, 1857, which says:—

"In 1856, there were regularly published in Germany 1,206 newspapers devoted to politics and news, 191 to theology, 68 to philology, 69 to law, 68 to general literature, 85 to history, 80 to medicine, 78 to natural sciences, 129 to agriculture, 129 to commerce and mechanics, 99 to modern literature, 21 for children, and 111 of miscellaneous contents."

This shows that there are 2,061 newspapers printed in Germany, while, according to a recent statement of one of the western German papers, the whole number of German papers, periodicals, &c., published in the United States is 138. In addition to the above figures, two circumstances should be considered: in the first place, the heavy stamp-duty demanded by the government in Germany on all periodical publications, makes those very expensive, in comparison to the same in this country, where they cost nothing but the actual expense of printing, &c.; and in the second place, a very large proportion of the population in Germany consists of people whose earnings are so small that the expense of a newspaper would be a large item; and it is, therefore, usual there for two or three, and

even so many as six or eight families, to club together, and take one newspaper or other periodical between them, reading it by turns, according to arrangement made; while many are dependent for their news on the papers found at the confectioners, beer-houses, or public reading-rooms.

A GERMAN.

Pittsburg, Pa., February, 1858.

[The item to which our correspondent refers was taken from the miscellaneous column of one of our leading daily papers. We do not know where the responsibility of the miscalculation rests, but we are pleased to receive and publish the facts as set forth in the above letter. They are, no doubt, correct.]

#### A Cup of Bitters.

Thoughtless people would have the world made up of sweets; they would expunge bitter substances as useless. When, however, we look into nature's laboratory, we see that bitters have not been made in vain. The consumption of bitter substances by the human family is so great that it can only be compared to the demand for sweets. Bitter substances, like sweets, can be extracted from a great variety of plants growing in different parts of the earth. The purest bitter principle is yielded by the quassia tree, so called after a negro named Quassi, who used it with remarkable success in curing a malignant fever which prevailed at Surinam. Nearly all the bitter plants are called *febrifuges*, from their power to cure fever. It is not, however, in ill health that bitters are solely used, but in ordinary beverages, which are not absolutely essential to support life. The principal bitter used in England is well-known to be derived from the hop plant; in Germany it is from wormwood; in Italy it is from absinth. In the latter country we see men smoking their segars, and if leisurely conversing they drink "bottled absinth," which, to an English palate, is so bitter as to be perfectly nauseous. In the Levant they eat a sort of gourd, or bitter cucumber. Some of the Biblical interpreters think that this is the plant spoken of in the Second Book of Kings, Chap. IV, ver. 39-41, on tasting which for the first time, the people exclaimed to Elisha "there is death in the pot," but on being mixed with meal there was "no harm in it." In Scotland they dry and chew the roots of the bitter vetch; these roots are also put into their whiskey. The bitter vetch is reputed to have the power of allaying hunger and thirst for a lengthened period; but in London the "evening toppers" drink bitters in the morning to stimulate the appetite. There are a great many other bitter plants used in various parts of the world. In Sweden the marsh sedum, or wild rosemary, takes the place of the hop; and in North America they have a plant called *Labrador tea*, which affords a more bitter infusion than the China tea used in England. Among the other numerous bitters we must not forget the chamomile, the bitter of which is said to be the only remedy for nightmare. Marmalade, turnip-tops, and many other things are included among the bitter food which we eat and relish. It is not a little remarkable that young people have a dislike to anything that is bitter, while elderly persons generally prefer bitter things. This is just as it should be; for as life advances, our spiritual self would seem to require a sort of grease to the wheel—a resin to the bow; and this is well supplied by bitters.

SEPTIMUS PIESSE.

#### Calcareous Rocks.

These are composed of carbonate of lime, and are called by various names according to their state of aggregation. In marbles and Iceland spar, it occurs in crystals: in lias limestone, it is compact; and in chalk almost pulverulent. The colors of calcareous rocks are even more various than their structures. Iceland spar is perfectly transparent; pure marble and chalk are white, whilst other varieties of this substance possess colors differing according to the nature of the organic or inorganic substances by which they are stained.



## New Inventions.

## Circle of the Scientific Press.

This interesting society has held its weekly meetings in Paris with great regularity, and has devoted much of its time to the discussion of the plan for tunneling the Straits of Dover, which it has decided can be done. Photography has also received a share of its attention; and some highly interesting papers on the heating qualities of coke when mixed with anthracite, have been read by M. Tardieu, to which we shall call more especial attention on a future occasion.

## Psychography.

This is the name given to a new branch of art recently brought to great perfection by an Italian named Muratiri, in Paris. It consists in simply cutting out sheets of black paper in such a way as to make it into a picture, which has all the finish of an engraving. The production of landscapes was first attempted by this method by a German named Schmidt; but Muratiri is stated to produce views equal to those of the best artists employing brush and pencil.

## Machines Wanted.

First, A machine capable of carding and spinning wool, for the use of a family of moderate size, to be run by means of a crank turned by hand, or by any other cheap power, and of such size as would be convenient for a farmer to have in his house. Second, A machine to do the knitting of a family.

W. W. G.

[There are knitting machines in use of the character referred to by our co-responder, but none for carding and spinning, so far as we know. We have no doubt but such can easily be made, and would be of great advantage to many families. We exhort inventors to devote considerable attention to the invention of neat portable machines, whereby every farmer's family may be enabled to make their own cloth—carding, spinning, and weaving—in a superior manner to the clumsy machines and processes whereby home-made fabrics are now manufactured.—Eds.]

## Automatic Field Gate.

The trouble of opening gates is one of the great inconveniences experienced in riding or driving in the country, and even the carman, sitting on his cart, has a decided objection to coming down and opening the gate, that his horse and cart may pass through. Every one, more or less, has felt this trouble, and in consequence self-opening and closing gates have been invented to supply the want.

The gate shown in our engraving is one of the most recent, and possesses some novelty. Fig. 1 is a perspective view of the gate and approach, in which A represents the post, from which the gate is swung, and B the post against which it closes. C is the gate, which has a catch kept closed by the spring, G, and to open the gate it is requisite that the catch be pulled back against the spring, the tendency of which is to keep it out. The gate is hung from a bar, E, provided with a small pulley, e, at the bottom, and another, e', on the top. Around this, and fastened by one end to it, are wound the spiral springs, F, both meeting and connected with opposite sides of the gate at f. D and D' are two posts, each having a latch, against which the gate shuts when opened. H H' H'' H''' are cranks in the ground, over which the wheels of the carriage pass, and their weight pressing the cranks down, the gate is operated. Suppose a carriage to be advancing to the gate from the foreground of the engraving; the wheels pass over H', and pressing it down, cause the pulley at its extremity to perform a quarter revolution; this operates the cords, i, which being connected with e, wind up the spring, F, and at the same time pulling back the catch, the gate is released, and the force of F carries it round to D'; the passage is

now clear, and the carriage wheel passes over H'', the crank on which is connected by the rod, h, to e, and this turning e again, the catch is released, and the spring wound up in a reverse direction, and the gate flies back to the post, B. If a carriage be coming the other way, the reverse takes place, H''' or H'' being first pressed down, and the gate

flies to D. Should the person wishing the gate opened be on horseback or on foot, it might be somewhat difficult to cause the feet to tread in exactly the right place, so another contrivance is added. On the top of D and D' are boxes containing small pulleys, k, and over these, cords, j, connected with e', and having at their ends balls or weights, J, de-

## SMART'S AUTOMATIC FIELD GATE.

Fig. 1

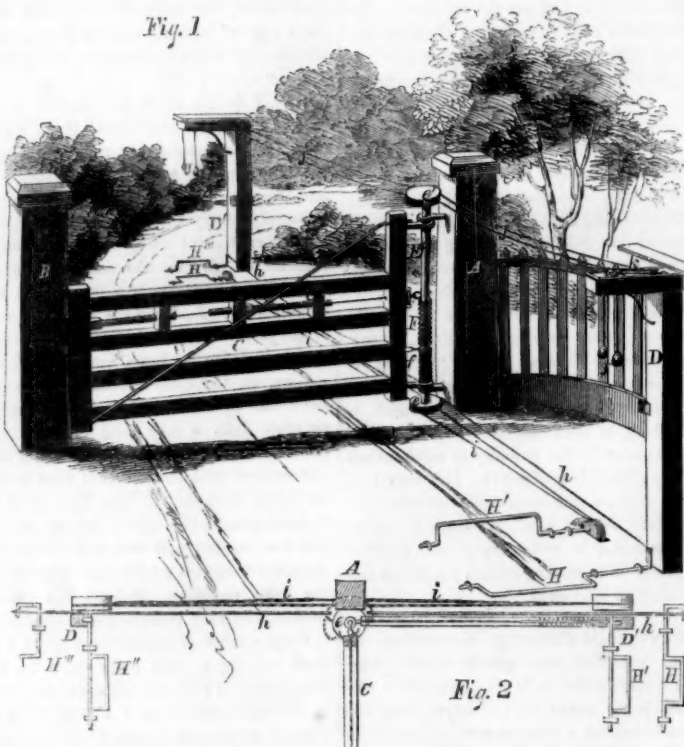


Fig. 2

pending. A person advancing from either side of the gate, can, by pulling one of these weights, cause the gate to open, and by doing the same when through, the gate will close behind him, there being no necessity that he should dismount if on horseback.

The great novelty consists in the employment and combination of the spring and

catch and rod, so that when the catch is drawn back, the spring receives at the same time sufficient power to open the gate in either direction. Fig. 2 is a plan view.

It is the invention of C. W. Smart, of Watertown, N. Y., who will give any information that may be desired. It was patented December 22, 1857.

## MIHAN'S PATENT GAS STOVE.

Fig. 1


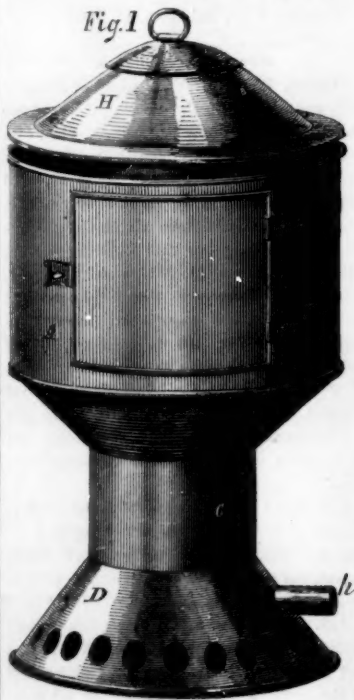


Fig. 2

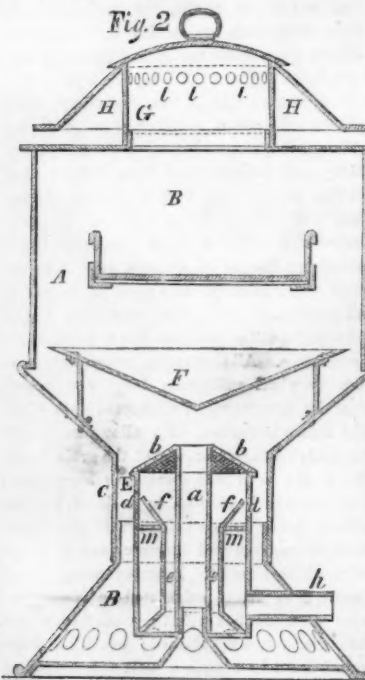

Among the numberless applications of coal, and other gas to the comfort and use of man, there is not one superior to gas as a heater. It is so cleanly, so easily lighted, so cheap, and gives so much warmth, that any device for radiating all the heat given out in combustion must be acceptable.

The stove which is represented in our illustrations (of which Fig. 1 is a perspective

view, and Fig. 2 a section,) is intended for this purpose, and its peculiar features we will now describe. In the perspective view, only the external parts are seen, which are: D, a conical shaped base, perforated with holes to admit the amount of external air necessary for the combustion of the gas; A, a pipe that admits the gas; H, a more or less closed

cover. In the section, Fig. 2, it will be seen that the gas, entering at A, passes into the burner, E, situated in the portion, C, of the stove; after surrounding the burner, it passes through the diaphragm, m, and becomes regulated in its stream, and then meeting the deflecting plates, f, it meets with the air drawn up through e, and becomes perfectly mixed; this mixture is burned with an excess of air through the tube, a, on the wire gauze cone, b, extending all round, from the outer case, d, of the burner, E, to the central tube. By this method of combustion, all the heat is obtained and no smoke produced, and the heat, striking against the deflecting plate, F, passes all around the tray, (shown in Fig. 2,) on which anything may be baked, thus making an oven of the stove, and passing up G through the holes, l, and down into the room, after having done its utmost, through the space between H and A.

This gas stove is the invention of Patrick Mihan, of Boston, Mass., who will furnish further information. Patented July 7, 1857.

## French Flouring Mills.

Until recently, French flouring mills were of the most rude and clumsy construction—very much like the American mills of the past century. Lately very great improvements have been made in France in such mills, and in some arrangements they are perhaps in advance of us.

M. Burden, as stated in a foreign cotemporary, has recently erected a mill driven by a turbine wheel under a very high fall, which operates five pairs of stones and all the attendant machinery, such as separators, elevators, &c. The turbine is placed in the basement of the mill, and its main shaft extends upwards through all the floors to the top story. All the stones are driven from this shaft by direct action, and the auxiliary machines with belting. In most of the grist mills in France the stones are now driven by belting; those in England are mostly driven by gearing; while in America some are driven by direct action from turbines, others by gearing, and others again by belting. We have been informed that the method of driving stones by gearing is the most expensive for first cost, but the most economical in the long run. The gearing, if well made, and the shafting well arranged, is more steady in its operation, and requires fewer repairs than belting, or direct action arrangements.

## The Necrology of 1857.

The past year has taken with it many bright spirits from the fields of science, among whom may be mentioned Hugh Miller, Dr. Kane, Dr. Ure, Dr. Conybeare and Redfield, the meteorologist. General Havelock, in India, General Cavaignac, of France, and Marshal Radetzky, of Austria, are among the heroes who have fallen before the universal conqueror, while the deaths of Thomas Crawford and Christian Rauch have left gaps in the art world that will not easily be filled up. Literature has been deprived of Beranger the poet, Douglas Jerrold the satirist, Dr. Dick the Christian philosopher, Dr. Griswold the author, and Mr. Gliddon the antiquarian. Truly, the world has suffered by the extinction of so many men of genius; but we have no doubt that others will be raised up to fill their vacant places.

## Clipper Ships.

This class of fast-sailing vessels which were called into popular existence by the discovery of gold in California, in order to make quick passages, have become somewhat unpopular with their owners. It is stated that very few of them pay expenses. The great number of sailors required to work them, their great original cost, and small amount of room for cargo, are greater drawbacks in a pecuniary way than all the advantages obtained from making fast voyages. All the new ships which have recently been built are of greater carrying capacity than the genuine clipper ships built four or five years ago.



# Scientific American.

NEW YORK, FEBRUARY 13, 1858.

## Reforms in the Patent Laws.

A telegram to the associated press of this city announces:—"The patent bills recently introduced by Messrs. Taylor, of New York, and Chaffee, of Massachusetts, and which were referred to the Committee on Patents, have been harmonized by these gentlemen, and will probably be reported to the House at an early day. The bill agreed upon proposes several important changes. It makes the Office independent, increases the fees to meet the increased expenses; creates a Board of Examiners-in-Chief, in order to secure uniformity in granting Letters Patent; gives an appeal to the Chief Commissioner, and makes his decision final; limits the time in which an interference can be made to two years, after which time it compels the parties to go into Chancery to take proof regularly in court, to test the rights of the parties; removes the restriction on foreigners, and makes all persons equal, without regard to citizenship; allows no withdrawals, no additional improvements, no disclaimers, and no caveats; it compels the attendance of witnesses as in civil suits, and authorizes magistrates in all the States to take testimony. The design of the bill is to restrain the indiscriminate issue of patents, and at the same time protect inventors and the rights of the people."

Upon a perusal of the points embraced in the above, they will strike our readers as essential and important reforms—such as have been repeatedly urged on the attention of Congress through the columns of the SCIENTIFIC AMERICAN; and were it not for the closing paragraph, which attracts our notice, we should not at this time occupy ourselves in discussing reforms in the patent laws.

We have been aware for some time past, that a patent bill, embodying a clause to restrict the Commissioner in the free performance of his duties, has been in process of cooking; and although, like the drug in the sugar-coated pill, the design does not fully appear in the brief synopsis of the bill which we publish above, yet we were assured by high authority that the bill of Mr. Taylor had this object fully in view. We do not intend to discuss, at present, in detail, the merits of this proposed bill. We prefer to wait until it is duly printed. Our particular object now is to call attention to the "design of the bill," as set forth in the above paragraph, viz., "to restrain the indiscriminate issue of patents." If we did not know, by an experience of many years, that the above paragraph contained a gross libel on the practice of the Patent Office, we might suspect that our system was little better than those existing in some European States, which allow patents for everything, "good, bad, and indifferent," without a preliminary examination. Every intelligent person who has had business with the United States Patent Office—every patent attorney—every inventor—knows (and many of them by sad experience) that a system of "indiscriminate issue" does not exist, and has not existed since 1836, at which time our patent system was thoroughly overhauled and repaired. The public may depend upon it that there is a "snake in the grass," which had better be poked with a stick before the hand is thrust in and thereby bitten.

There are a few old foggy patentees who have become rich, and wish to be made richer at public expense, whose principal business seems to be to hang about Washington during the sessions of Congress, "cliqueing" and clubbing together to carry out their own selfish ends, wholly in disregard of the rights of others. This clique constitutes a powerful "lobby," and is generally able to insinuate it-

self upon some verdant member of Congress, who will undertake the championship of their terrible wrongs. No other inventors ever suffered like these men—they have been harassed by litigation—pirates have robbed them; and if we could believe all they affirm of their own wrongs and sufferings, we should be impressed with the conviction that no class of Christian martyrs ever underwent equal pain and torture.

If we may believe newspaper reports, a new element has recently appeared to join hands with this suffering band of patent (not patient) martyrs. Some Examiners, all of a sudden, have been seized with a holy horror, because Commissioner Holt has appointed from out of their number an Appeal Board of apparently sympathizing, liberal men, who sometimes overrule the previous decisions of the other Examiners; and these latter, therefore, are crying "mad dog," "worthless patents," &c., and are terribly affected with the horrid thought that the country will be deluged with those useless parchments. We wish not to be misunderstood on this point. We have confidence in most of the Examiners now in the Patent Office; they are worthy men, and no doubt endeavor to exercise a proper judgment in all cases brought to their examination. It is nevertheless true, however, that some of the older Examiners (the Office is nearly clear of them now) have suffered their views to contract very much in judging questions of novelty, and there can be no doubt whatever that many cases are wrongfully rejected; hence the necessity of a liberal Appeal Board, which, in the language of the Commissioner, will "kindly and anxiously sift from the invention its minutest patentable features."

The two elements combined in this scheme to limit the functions of the Commissioner, by depriving him of the power to select a Board favorable to the harmonious working of such a system as, in his judgment, will best subserve the interests of which he is the appointed guardian, will work no ultimate good; and we hope that Congress will not lend its authority to cripple or in any manner interfere with its judicious development.

## African Discoveries.

In looking at a map of the African continent one is immediately struck with its imperfections, that is to say, so few places are marked upon it, and all the central portion is described as an "unexplored region," and in casting the eye over it, the word "desert" is frequently seen. From this, and many other causes, mostly traditional, the world has been in the habit of regarding the central portion of Africa as a gigantic waste of sand, on which a tropic sun was ever shining, and where the only breeze that ever wafted over its plains was the deadly sirocco or simoon. Gradually, but slowly, these ideas have been losing ground, and the reading and inquiring portion of the community here and in Great Britain have been anxious to know more about this portion of our globe, of which their pre-conceived notions were so very crude.

Mungo Park, James Bruce, and Gordon Cumming have all told such marvelous tales of rich plains and verdant hills, rivers and inland seas, that people have put them down as, at least, romancers; but at last the time has come when all their accounts of beauty and fertility are corroborated, and the idea of African deserts has received, in a great measure, its death-blow, from two gentlemen whose travels are now before the world: one of them, Dr. Livingstone, a missionary, and the other Dr. Barth, a medical man, who was sent out, we believe, by the British government, to make an official report of his discoveries and researches. The former gentleman has chiefly explored Western Africa, and has discovered a vast inland sea (Lake Ngami). Generally he found the land rich and fertile, and the inhabitants hospitable, but not too much given to the arts of peace. In nearly the whole district through which, for about ten years, he has been traveling, the inhabitants were pagans. Dr. Livingstone's book con-

tains much valuable and interesting information, and is full of exciting anecdotes, and pleasant details of the manners and customs of the tribes who entertained him; but it is to Dr. Barth's travels in North and Central Africa that we must turn for practical information. He tells us that there is uninterrupted water communication from the Bay of Biafra to the great Lake Tsad, (or, as it is spelt on the maps, Tchad,) by means of the rivers Bi-nuwé and Kwara. The banks of both of these rivers are lined with villages inhabited by peaceful and industrious natives, who raise cotton, tobacco, and negro corn; there is some attempt at ornament in their clay-built houses, and altogether they are in a far more advanced state of civilization than is generally supposed. The country is extremely beautiful, fertile, and well-watered, and in every way suited to the production of those plants which require a warm sun. The general description of all travelers has been: "Beautiful plains, well-wooded slopes, park-like scenery," and other expressions of similar import. As a climax, Africa is proved to be rich, not barren; fertile, not sterile; and all that she wants to develop her resources is the improving hand of the white man, to teach her present owners the arts of civilization.

We should not be surprised if, in less than fifty years, steamboats were plying on her rivers, and tracks were being laid for railways, for there is little doubt that now her resources have been made known, it will not be long before some enterprising Yankee goes off to find applications for them; and no matter who it may be, we shall wish every pioneer, from wherever he starts, who goes to spread civilization among the wild tribes of the desert, or more peaceful denizens of the plain, a most hearty and earnest "Success be with you!"

## Special Legislation on Patents.

"The House Committee on Patents have reported a bill extending for seven years the patent of David Bruce for his type-casting machine, and a bill extending for a like term Wm. Crompton's patent for an improvement in figure or fancy power looms."

The above significant paragraph we find under the telegraphic news of our daily papers of the 5th inst. The work of the Patent Committees in Congress has evidently commenced in earnest, and although the two cases on which they have reported are not so specially obnoxious to the community at large as many cases which the Committee have under advisement, they clearly indicate the sentiments of this Committee, and their acts in these two cases foreshadow what may be expected hereafter.

We object, in toto, to the system of extending patents by special legislation as long as we have a Patent Office with a good code of laws which are ample for the protection of every inventor, and we believe the Committees in both Houses of Congress would do the public a benefit by reporting adversely on every case presented to their attention. The Patent Office is the place to go to get patents extended as well as granted, and every applicant who can show that he is entitled to protection for a period beyond the 14 years for which his patent is originally granted, can enjoy his privilege for seven years longer by complying with the statutes and conforming to the rules of the Patent Office in filing his testimony.

But the most of those, and perhaps we might in truth state that all those who are asking Congress to legislate on their patents, have either had the benefit of the seven years' extension by the Patent Office, and already enjoyed a monopoly of their invention for 21 years, or else have so failed to blind the eyes of the Commissioner by their statements at the time of asking for the extensions, that he could see that they had been already well remunerated, and thus were not entitled to further protection. The public may be assured that almost every applicant's patent has passed through one or the other of these phases.

The Crompton patent—now sought to be extended—was originally patented Nov. 23, 1837, and in 1851 it was extended by the Patent Office for seven years to Edson Fessenden, as conservator, making 21 years this patent has been in existence.

The patent on which Mr. Bruce seeks an extension was granted in November, 1848, but for some reason he failed, it seems, to get it extended by the Patent Office, and consequently it expired in November, 1857, since which period it has been public property. He now asks Congress to issue to him a new patent; for so long as the original patent has expired, it of course cannot be revived, and there is now no way in which he can get his dead patent into existence, unless Congress instructs the Commissioner of Patents to grant to Mr. Bruce a new patent.

That Congress has the power to extend patents after the patentee or owner has had the benefit of the full protection afforded by the statutes which regulate the issue and duration of patents is a question which we do not propose to discuss at present. But it is our opinion that whenever a patent has expired and the invention thus becomes public property, our courts would not sustain the renewed patent on constitutional grounds. It seems to us to be a species of special legislation not sanctioned either by right or justice, as it takes rights from the public to which they are entitled and confers them upon an individual.

## Murexid Colors.

Uric acid, when dissolved in dilute nitric acid and exposed to heat until it becomes dry, assumes a deep red appearance, and when treated with ammonia afterwards, is changed into a rich purple color, forming the "purpurate of ammonia," or murexid. It is obtained in the form of beautiful crystals, which appear of a deep red color by transmitted, and a green color by reflected light. The murexid is soluble in ether, alcohol, and water, and produces beautiful tints on various fabrics. When first discovered, some years since, its application to the coloring of silk was immediately suggested, but it was not until very lately that this could be done in such a manner as to make the color even moderately permanent; it was almost as fugitive when exposed to sunlight as the yellow stains of turmeric, which are about as fleeting as a shadow.

To fix the purpurate of ammonia color on silk, a solution of it is mixed with another of corrosive sublimate in a bath; on the silk being immersed in the liquor, it soon assumes the rich purple shade, the depth and tone of which depends on the amount of murexid and corrosive sublimate used. A weak solution produces lilac shades; strong solutions, deep purple shades. This method of fixing the murexid is stated to be a recent discovery of M. Depouilly, a practical chemist in Paris.

These purpurate colors are also applicable to wool, and have been in use for some years in Germany, where chemistry is studied more thoroughly than in any other part of the world. The process for coloring wool is different from that of silk. All the dirt and grease being first removed, the wool is handled for half an hour in a warm bath, somewhat strong, of the murexid, and then dried in the open air. After this it is put through a second bath, at a heat of 160° Fah., containing corrosive sublimate and acetate of soda, in quantities of 2 ounces of sublimate and 3 ounces of the acetate to every 2½ gallons of water. In about twenty minutes a beautiful purple color is obtained on the wool. A little oxalic acid is generally added to the first murexid bath. Cotton is colored in a strong solution of the murexid and nitrate of lead. Corrosive sublimate and the acetate of soda are also used as the fixing agents in a finishing warm bath. The color can be printed on the white ground of calicos by making up the paste in the proportions of 10 oz. of murexid and 10 oz. of nitrate of lead in 30 oz. of water—thickening with gum to the proper consistency for print-



ing. After the color is printed on the goods, they are passed quickly through a tight box, heated to 160° Fah., containing ammoniacal gas. The colors of purpate of ammonia thus obtained are stated to be very beautiful.

All colors—those on goods, fruits and flowers—are not substantives, as some suppose, but merely the reflection of light caused by the peculiar forms of the objects which reflect them. All the colors of the rainbow are reflected by a drop of water, yet the water is colorless. It is the same with a prism of glass or rock crystal, which is transparent and white of itself. Some have supposed that a science might be built up by which the composition of substances could be determined by their colors, but this is an impossibility. There are black and white diamonds, and tin and iron assume red, yellow, and blue tints by simple exposure to different degrees of heat. The colors on goods—such as silk, cotton, and wool—are due to exceedingly minute crystals precipitated in their pores or cells by chemical affinity or electrical action.

#### Moonology.

A correspondent—F. M. Shelton—writing to us from Kirksville, Mo., says:—

"I find that the inhabitants of Missouri ascribe to the moon great influence, whereas the people in the New England States, as a general thing, regard it as mere superstition. For instance, throw two pieces of board upon grass, one during the light of the moon, and the other during its darkness; and at the end of six weeks the grass under the one will be dead, while that under the other will be green. Again, build two parallel pieces of fence during the light and dark of the moon; and at the end of a year, one will be found to have perceptibly settled, whereas the other will have remained as when it was built. Again, by laying two courses of shingles during the light and dark of the moon, the one course will warp, while the other will remain level. The Missourians say this is not a theory to be supported by argument, but a self-evident fact. I request you to solve the question 'Does the moon exercise any such influence upon the earth?'"

Our correspondent is correct in his views regarding the proofs for establishing the moon's influence. It is not argument, but facts, by which such a theory can be supported or overthrown. We can easily conceive how the moon's rays may exercise a chemical influence on those bodies upon which they fall, but why, after a considerable period of time, they should cause a fence to sink that was built during the light of the moon, and not affect another erected during the dark of the moon, surpasses our comprehension, and we believe that such is not the case, although it may be a belief in Missouri, and other sections of the country. If it is the light of the moon which exercises such an influence, of course both of the fences referred to should be affected, but in different proportions. That exposed for one year to the light of twelve moons should exhibit an effect one-twelfth greater than the one exposed to that of eleven moons—no more, and no less; and the same results should be exhibited with the two courses of shingles.

We believe that the moon does exercise some influence on vegetation, and other objects, but at the same time we are positive that many wrong notions are afloat regarding the nature and extent of such influences. Those farmers who sow their seed, plant their potatoes, put up their fences, and shingle their houses under the direction of Mrs. Moon, are undoubtedly, deeply tinged with superstitious notions. We have seen it demonstrated in practice, that those farmers who pay no attention to the moon's periods in sowing, planting, or reaping, raise as good crops as those who are strong believers in lunar "cantraps," or the magic influence of the moon.

It is an established fact, we believe, that fresh meat or fish putrifies much sooner by exposure to the moon's rays than it would if kept under cover; this is due to the chemical

influence of such light. This opinion, however, is opposed to that of Arago and Dr. Lardner, in their work on popular astronomy. They admit that the exposed meat putrifies sooner, but say "it is owing to its being more cooled by radiation, thus causing it to imbibe moisture, which is a source of decomposition to animal bodies."

The theory of these philosophers is undoubtedly incorrect, because they have advanced no proof regarding the exposed meat imbibing moisture, nor if it did, that this is the cause of its more rapid decomposition. Their theory is also based (and they have so stated it) upon the supposition that the moon's rays possess no chemical influence whatever, whereas we now know that Luna can take her own picture on the sensitive sheet of the photographer—thus demonstrating the chemical power of her light.

A common and popular opinion—said to be an old Indian notion—is, that when the crescent of the new moon appears in position as if a powder-horn could be hung upon it, warm weather may be expected to follow. Be this belief a superstitious notion or not, it has some foundation in fact, as has been proven by many observations, and never more conclusively than during the past month of mild weather, when the dim disk of the new moon appeared as if reposing on a crescent of silver.

#### Natural Oil Springs.

In some localities of our country, oil is obtained like water; in one place it is found bubbling from the hill-side; in another by boring deep through hard rock; and in another, saturating the soil, like water in the marsh. Some of these oil springs were known to the aborigines before the feet of white men had pressed the leaves lying in the dark forest, and the oil itself had been used by them for medicinal purposes, such as for removing pains, by applying it outwardly. For the same purpose it is now much employed by all classes of our people; and in some sections of the country it affords the means of artificial light and lubrication.

At Tarentum, Alleghany county, Pa., a clear and beautiful oil is obtained, which is similar, in nearly every feature, to the best refined coal oils; and it is used without any refining process just as it comes from the bosom of the earth, for burning fluid and for lubricating machinery. In a sample of it sent us by Messrs. Irvin and Peterson, of the above place, there are naphthalene, paraffine, and a trace of bitumen, thus showing that it is of the same nature as the oils now obtained by distilling bituminous coals and shales at comparatively low temperatures. In relation to the source of this oil, these gentlemen, in their letter to us, say:—

"The borings of the numerous wells in this vicinity prove conclusively the non-existence of vast fields of coal immediately beneath the surface. A question now arises as to where our supply of oil comes from. Your remarks recently, in elucidation of this subject, (page 123) are verified by our practical experience."

Some small seams of coal are found at Tarentum by boring; also salt water at a depth of 600 feet; and, strange to relate, a vein of fresh water impregnated with carbureted hydrogen 640 feet below the salt, or 1,240 feet deep.

We have also received a letter on the same subject, but relating to a different oil conservatory, from J. W. Hoff, of Wirt Court-house, Va., in which he describes the petroleum oil sources in that neighborhood. They were first discovered by an old hunter named Stokeley, on Hughes' river, near its junction with the Little Kanawha. This oil is found at a very short distance below the surface of the ground, and extends in a horizontal bed about one mile along the river running west, and back, north and south, for about fifteen miles. It lies saturating a stratum of coarse sand six feet deep, and from every space of ten square feet about ten barrels of oil may be secured. Immediately above the oil bed, there is a thin stratum of blue marl, through which the oil does not rise, and above this

there are a few feet of soil. The soil and marl are removed to obtain the oil, and a puddle is then formed, by throwing water into the sand, and puddling it with a spade or hoe. It is then allowed to settle, after which the oil is found floating on the top of the water, is lifted with ladles, and afterwards barreled up and sold at prices varying from 25 to 40 cents per gallon. There is a blowing salt well in the vicinity, which also forces out considerable quantities of very pure oil daily.

The oil conservatory on Hughes' river is somewhat different in its characteristics from that at Tarentum, but the oil in both is undoubtedly the product of distillation from carbonaceous deposits by subterranean heat. There are a series of rich coal beds under the oil; at a depth of only 100 feet there is a vein of cannel coal 27 feet in thickness. Our correspondent states that in all probability this oil is of recent formation, or rather that it is being formed all the time from the subterranean seam of coal. The blowing out of large quantities of it in the salt well would go to substantiate this opinion. This region is rich in iron, coal, and other minerals, all of easy approach, and capable of being worked at a small cost. It is probable that at some future day, not very far distant, it will afford an immense field for industrial effort and enterprise.

#### Ancient Uses of Cork.

There are some substances in the use of which we have not made much progress, partly from the fact that other materials have been discovered to supply their place, and partly from the substance itself possessing such palpable peculiarities that its earliest discoverers must have seen at once for what it was most applicable. This is the case with cork. The Romans used it as soles to put into their shoes, to keep their feet warm and dry; and as there were no high heels in those days, the ladies used it to make them appear tall. Camillus swam the Tiber with the aid of a cork jacket, fishermen used it as floats to their nets, and buoys to their anchors, and Pliny tells us that it was employed as stoppers to vessels of all kinds. The old Spaniards lined the walls of their houses with cork, because it kept them warm and prevented dampness; and lastly, the Egyptians manufactured coffins of it, which, being lined with a resinous composition, preserved their dead from decay. The method employed in Portugal of cutting the bark and burning the outside, is the same to-day as it was one thousand years ago; so that altogether, we cannot say that we have done very much with cork that has not been done before. It is quite time that we made a start and discovered some new uses and appliances for this cheap and plentiful material.

#### Literary Notices.

**THE LIFE OF DR. KANE.**—The biographies of the great and glorious dead are to the living what beacons and lighthouses are to the mariner, showing him the wide spread sand banks and hidden rocks of danger, and the narrow channels through which his ship may sail in safety. This biography is what we would call a great memoir of a great man, for well and ably has Dr. Elder done his work, and if now and then the friend replaces the impartial historian, it is too good a quality not to be excused. Dr. Kane's life was one of exciting adventure and dangerous position, yet with the courage of a hero, the calmness of a man, and the earnestness of a philosopher, he met them all. It is a book teaching a great lesson which all should read and learn—the lesson of living with an aim and for an end; ill health or disappointment only incited him to more severe labor, and his name will live with Parry and Franklin to the remotest age, while his life will be placed in the archives dedicated to the memories of past genius. It is published by Childs & Peterson, of Philadelphia. Sheldon, Blakeman & Co., 115 Nassau street, New York, agents.

**BOOT AND SHOE DRAFTING.**—We have received the first number of a work called "Upfield's Illustrated System for Drafting Patterns, and Scales for Cutting Boot and Shoe Uppers and Soles." It is to be issued in four quarterly parts, and we understand the system is something new. We suppose it must be useful to the sons of St. Crispin. The author, Wm. Upfield, is publisher; his address, New York City Post Office. Mr. U.'s residence or place of business should have been given.

**HUNT'S MERCHANT'S MAGAZINE.**—Freeman Hunt, New York.—This magazine for February contains many excellent articles, one on "Banks or no Banks," and another on the "Ports of the Sandwich Islands," by H. M. Whitney, editor of the *Pacific Commercial Advertiser*, together with all the financial and mercantile news of the past month.

**AMERICAN VETERINARY JOURNAL.**—G. H. Dodd, Boston, Mass.—The value of the horse is never to be too highly estimated, and it should be the pleasure of every one to know how to treat him when he is sick, and how to keep him well. This knowledge can be acquired through this periodical, which monthly gives forth information of the practical kind about this noble animal.

## Correspondents

G. W. N., of Ga.—Our readers should now be well acquainted with our views respecting "perpetual motions"—they are delusions. It would be a waste of space, and against our principles, to notice every absurd story about such machines being discovered, such as the one to which you allude, described in the *Journal of Commerce*. Our great object is to present new, practical, and useful information.

T. S. G., of Mich.—There are but very few buildings erected with hollow walls. Plaster may be put on hollow brick walls without lathing, but not on solid walls, unless they are very thick, because moisture passes through thin walls and causes the plaster to crack off. We prefer lathing all inside walls for plastering. We believe there is no difference in the durability of either kind of brick walls.

C. R. W., of Ohio.—The idea of constructing railroad axles hollow is not new. They have been used in England for some years, but not on any of our railroads, so far as we know. A hollow axle of two-thirds the weight of a solid one is said to be equally as strong.

F. W. W., of C. W.—There are a number of good machines for making shoe pegs, but whose is the best we do not know.

M. McG., of Mich.—There are numerous models in the Patent Office of chairs constructed to support the wheels at the joints of the rails, like yours; there are also car ventilators in which your invention in that line is embraced.

James Widney will please to furnish us with his Post-office address, and we will write to him in regard to his invention. We caution our correspondents to be particular on this point, as it is often difficult for us to determine how to address letters.

G. C. R., of Texas.—We have received no communication from you within the past six months, so far as we can recollect.

O. H., of Cal.—You cannot get a patent for making an article of gutta percha which has hitherto been made of wood. The substitution of one well-known material for another in the fabrication of an article, is not the legitimate subject of a patent. We cannot answer your inquiries respecting the cost of crude gutta percha, or the cost of manufactured paper mache. The price of Welschenborn's work is \$1 per number, and is sold only to subscribers. We have credited you \$2.50 in full, for subscription.

C. C., of Pa.—A. A. Thomson, 215 Water street, this city, sells tinners' and coppersmiths' tools. Those wanting coppersmiths' articles should describe minutely the kind of tools they want.

J. D., of Mo.—A gudgeon of wrought iron 3 inches in diameter, and faced with steel, will easily support an upright shaft with twenty tons' weight upon it. But if you would make the gudgeon six inches in diameter, it would not be so liable to cut and wear out the step-bearing, because the friction is principally due to the superincumbent weight.

J. R., of Ill.—Your plan for propelling balloons by the use of high-pressure steam escaping from a pipe at the rear end of the apparatus, upon the rocket reaction principle, is certainly novel, and if you make it operate, you can, no doubt, obtain a patent.

J. C., of N. Y.—You should rather seek to cultivate than eradicate your bushy beard; but if you are really determined to denude yourself of surplus hair, use a powder made of three ounces of slacked lime and half an ounce of orpiment made into a paste with water, and applied to the spot in a coating. Let it stay on for 20 minutes, then wash it off, and apply a little sweet cream. Two or three applications will make the hair fall out for ever. You can also purchase depilatory powders in any perfumery store.

J. B., of N. Y.—It appears to us that you seem to imagine you have discovered perpetual motion. You intend to employ a hydraulic ram to pump back into a reservoir the water used to drive a wheel, and thus make the same water drive the wheel continually. But how are you going to operate the ram? You seem to regard it as a kind of live animal, whereas it will take more power to raise the water expended in driving the wheel, than you can obtain from it acting on the wheel. *Reductio ad absurdum.*

S. S. F. & Co., of Pa.—Power is weight, or pressure multiplied into velocity. The only way you can find out the power of the blow struck on the wedge by the battering-ram to which you refer, is to multiply the weight of the same into its velocity; this will give you the amount of the power. You have neither given us the weight of the battering-ram nor the speed with which it was operated.

H. P. D., of N. J.—Flour spar is obtained at Muscononge Lake, St. Lawrence co., N. Y., at Lockport, N. Y., at the Notch in the White Mountains, N. H., and at Putney, Vt. We are not acquainted with its price.

J. W. G., of Wis.—Ivory is fastened to wood by a strong solution of glue, in the same manner that two pieces of wood are cemented together.

L. F. B., of N. Y.—Friction matches are first slit, in bunches, from planks and blocks, by machinery, then they are tipped, by dipping them first in melted sulphur, and afterwards in a paste composed of 16 parts, by weight, of gum arabic, 9 of phosphorus, 14 of niter, 16 of oxyd of manganese, and a little sulphuret of antimony.

D. B., of Ill.—We do not think a policeman's club made of iron would be adopted. It is much preferable to make the club of wood.

H. G., of Cal.—If you wish our opinion in regard to the probable novelty of your steam plow, you must furnish us with a sketch and description of it. We do not comprehend your plan from the written description.

H. L., of Conn.—We have seen hundreds of silver fish in a pond, the water of which passed through the



condenser of a large steam engine. If such water is supplied with plenty of oxygen from the atmosphere it may be used either by fish or flesh. For this purpose it requires to be exposed to the open air after it has passed through the condenser.

W. W. R., of Ill.—Gold pens cannot be re-pointed, as the heat required to solder on the new points totally destroys the elasticity of the metal forming the pen.

A. M. B., of Pa.—A "stencil cutting" is punching a hole in the shape of a letter of the alphabet or other mark through a thin sheet of metal, so that when it is laid on anything, and a brush of ink rubbed over it, the mark or letter is inked upon the material. We are not aware that there is any book published on the subject. We believe that it is done with punches, and the work finished off with files.

N. A. Patterson, of Kingston, Tenn., desires to correspond with all the harvesting machine makers in the United States. Send him your addresses, gentlemen, and he will communicate his wishes.

C. R., of La.—In another column you will find the advertisement of J. H. Lidgerwood & Co., who state that they can furnish machinery suitable for grinding sugar cane of every description. They are the proper parties for you to address concerning machinery for grinding and pressing sugar cane.

B. F. L., of Mass.—We do not think a patent can be secured for drilling holes in the stones of the Russ pavement, and filling them in with earth. It is not a patentable subject, besides we think the suggestion is not new.

J. A., of Conn.—We have not at command the information you want in reference to agents of iron works in this city.

G. D., of Pa.—We have no doubt that there is no monopoly in the sword-blade manufacture, and we are surprised the press of this country could countenance the idea. It was for the purpose of bringing out such information as you have given that the paragraph was inserted.

J. de Y., of Texas.—The tracks of all railroads have the outside rail of a curve a little above the inner, to compensate for the tendency of a train to lean inward when running a curve. Where the road is straight the rails are level.

J. W. R., of Mass.—Lac dissolved in alcohol will suit as a tasteless cement for your "aquarium." A box well jointed, and painted inside, should be water tight, without the use of cement. If the paint is allowed to dry perfectly, it will communicate no taste to the water.

P. W., of Mass.—The idea of steeling the ends of rails is an old one. We do not know, however, that it has ever been carried out. No patent could be obtained on your invention.

G. G. V. W., of Wis.—You cannot use a patent winnowing and cleaner designed for flouring mills in a fanning mill without infringing the patent. The mere change of use, under such conditions, would not be justifiable. You can probably get such a fanning mill as you want at some agricultural warehouse in Milwaukee.

L. S., of N. Y.—The oxygen of the air became converted into carbonic acid by combination with the carbon of the substance burned which is dissolved by the water, and a little nitrogen remains in the top of the glass, but none expands and escapes as you suppose. From your vague description we cannot tell whether the barrow you mention would be patentable or not. Send us more particulars.

W. B. G., of N. Y.—In "Smee's Electro-Metallurgy," you will find information relating to the application of photography to etching on metallic plates.

D. H. M., of Mass.—You ask, "Which locomotive is the most advantageous, all other conditions being equal, one with a five foot driving wheel, or one with a six feet wheel, on a rising grade?" We reply the one with the five feet wheel. All freight locomotives are built with small wheels.

A. J. H., of D. C.—No advantage would be gained by increasing a 20-foot over-hoof wheel to 40 feet, the water being still admitted to the wheel at 20 feet. You have perhaps supposed that by increasing the leverage of the wheel, you thereby would gain power. Such ideas are fallacious.

D. and G., of Iowa.—You simply propose the centesimal measure which is now in use in France instead of our common duodecimal measure. We have recommended this reform in former volumes. You will find several articles on this subject in our last volume—the same regarding weights.

J. S., of N. Y.—The reform in weights and measures which we desire to see effected is one that shall be uniform for all nations. We think the French system is the best, and the most likely to be generally adopted.

R. J. K., of N. Y.—Liquid silicic acid (a soluble glass) is the best cement known to us for mending broken articles of glass.

M. W., of Wis.—A method of coating cast iron with silver is described on page 64, Vol. 5, Sci. Am.

Specifications and drawings belonging to parties with the following initials have been forwarded to the Patent Office during the week ending Saturday, February 6, 1858:—

C. W., of Pa.; G. S. C., of Ill.; P. D., of N. Y.; J. B., of Pa.; M. Van A., of N. Y.; A. B. H., of L. I.; S. J., of Tenn.; F. P. A., Jr., of Conn.; C. F., of N. Y.; H. & J. S. N., of Me.; C. L. C., of N. Y.; T. S., of Conn.; H. R., of Ind.; G. B., of Md.; F. C. W., of Conn.; R. K., of Mass.

Money received at the Scientific American Office on account of Patent Office business, for the week ending Saturday, February 6, 1858:—

J. G. B., of N. J., \$30; L. J., of Mass., \$30; J. L. R., of N. Y., \$30; F. S., of Pa., \$30; G. S. C., of Ill., \$35; P. D., of N. Y., \$35; J. F. K., of Ind., \$30; J. W. of Conn., \$30; C. D., of Pa., \$30; S. E. T., of Ct., \$10; J. B. of Pa., \$35; S. S., of Tenn., \$25; E. L. R., of Conn., \$55; C. F. A., of N. H., \$35; W. F. P., of Pa., \$10; J. F. A., of N. Y., \$30; M. E., of O., \$30; C. L. C., of N. Y., \$8; T. S., of Conn., \$35; A. J. C., of Ind., \$10; H. & J. S. N., of Me., \$35; N. P. A., of N. Y., \$30; C. F., of N. Y., \$10; G. L. D., of N. Y., \$30; G. W. H., of Conn., \$30; G. B., of Md., \$35; H. R., of Ind., \$30; J. C., of O., \$35;

J. S., of Ga., \$30; R. H., of Vt., \$30; L. R., of Pa., \$100; B. & T., of Mass., \$30; A. B. H., of L. I., \$35; R. R., of Mass., \$30; F. G. F., of N. Y., \$35; G. & B., of N. Y., \$30.

#### TO OUR SUBSCRIBERS.

RECEIPTS.—When money is paid at the office for subscriptions, a receipt for it will always be given; but when subscribers remit their money by mail, they may consider the arrival of the first paper a *bona fide* acknowledgment of the receipt of their funds. The Post Office law does not allow publishers to enclose receipts in the paper.

BACK NUMBERS.—After the 1st of January, we shall commence sending the SCIENTIFIC AMERICAN to new subscribers from the time their names are received, unless the person ordering expresses a desire to receive the back numbers, in which case complete sets will be furnished from the commencement of the volume.

#### TERMS OF ADVERTISING.

Twenty-five cents per line each insertion. We respectfully request that our patrons will make their advertisements as short as possible. Engravings cannot be admitted into the advertising columns.

\* \* All advertisements must be paid for before inserting.

#### IMPORTANT TO INVENTORS.

THE RAPID GROWTH OF OUR PATENT AGENCY business during the past three years has required a great addition to our ordinary facilities for its performance, and we are now able to announce the completion of a system which cannot fail to arrest the attention of all who have business of this kind to transact.

#### OUR PRINCIPAL OFFICE

will be, as usual, at No. 128 Fulton street, New York. There is no other city in the Union so easy of access from every quarter as this, consequently there are greater advantages in regard to the transmission of models, funds, &c., through the various channels that center in New York. Two of the partners of our firm reside here, and during the hours of business are always at hand to counsel and advise with inventors. They are assisted by a corps of skillful draftsmen, who have had many years of active experience in the preparation of cases for the Patent Office.

To render our Patent Agency Department complete in every respect, we have established a

BRANCH OFFICE IN THE CITY OF WASHINGTON, on the corner of F and Seventh streets, opposite the United States Patent Office. This office is under the general care of one of the firm, assisted by experienced examiners. The Branch Office is in daily communication with the Principal Office in New York, and personal attention will be given at the Patent Office to all such cases as may require it. Inventors and others who may visit Washington, having business at the Patent Office, are cordially invited to call at our office.

#### A SPECIAL NOTICE.

We especially require that all letters, models and remittances should be made to our address at New York.

#### EXAMINATION OF INVENTIONS.

We have been accustomed from the commencement of our business—twelve years since—to examine sketches and descriptions, and give advice in regard to the novelty of new inventions, without charge. We also furnish a printed circular of information to all who may wish it, giving instructions as to the proper method which should be adopted in making applications. This practice we shall still continue, and it is our purpose at all times to give such advice free and candidly to all who apply to us. In no case will we advise an inventor to make application unless we have confidence in his success before the Patent Office.

Our extensive experience in mechanical and chemical improvements enables us to decide adversely to nearly one half of the cases presented to us for our opinion, before any expense has occurred in the preparation of the case for a patent.

When doubt exists in regard to the novelty of an invention, we advise in such cases a

#### PRELIMINARY EXAMINATION

to be made at the Patent Office. We are prepared to conduct such examinations at the Patent Office through our "Branch Agency," upon being furnished with a sketch and description of the improvement. Our fee for this service will be \$5.

After sufficient experience under this system, we confidently recommend it as a safe precautionary step in all cases before application is made for a patent—not that there will be no rejections under this system. It is impossible to avoid such results in many cases, owing to the exceedingly wide range taken by the Examiners in the examination of cases; but, nevertheless, many applicants will be saved the expense of an application by adopting this course. Applicants who expect answers by mail must enclose stamps to pay return postage.

#### THE COSTS ATTENDING AN APPLICATION

for a patent through our agency are very moderate, and great care is exercised in their preparation. No cases are lost for want of care on our part in drawing up the papers, and if the claims are rejected, we enter upon a speedy examination of the reasons assigned by the Commissioner of Patents for the refusal, and make a report to our clients as to the prospects of success by further prosecution.

A circular containing fuller information respecting the method of applying for patents can be had gratis at either of our offices.

#### REJECTED APPLICATIONS.

We are prepared to undertake the investigation and prosecution of rejected cases, on reasonable terms. The close proximity of our Washington Agency to the Patent Office affords us rare opportunities for the examination and comparison of references, models, drawings, documents, &c. Our success in the prosecution of rejected cases has been very great. The principal portion of our charge is generally left dependent upon the final result. All persons having rejected cases which they desire to have prosecuted are invited to correspond with us on the subject, giving a brief history of their case, enclosing the official letters, &c.

#### FOREIGN PATENTS.

We are very extensively engaged in the preparation and securing of patents in the various European countries. For the transaction of this business we have offices at Nos. 65 Chancery Lane, London; 29 Boulevard Saint Martin, Paris; and 9 Rue Thermienne, Brussels. We think we may safely say that three-fourths of all the European patents secured to American citizens are procured through our Agency.

Inventors will do well to bear in mind that the English law does not limit the issue of patents to inventors. Any one can take out a patent there.

Circulars of information sent free on application. Remember the SCIENTIFIC AMERICAN PATENT AGENCY, No. 128 Fulton street, New York. MUNN & COMPANY, Proprietors.

The annexed letter from the late Commissioner of Patents we commend to the perusal of all persons interested in obtaining patents:—

Messrs. Munn & Co.—I take pleasure in stating that while I have the office of Commissioner of Patents,

MORE THAN ONE-FOURTH OF ALL THE BUSINESS OF THE OFFICE came through your hands. I have no doubt that the public confidence thus indicated has been fully deserved, as I have always observed, in all your intercourse with the Office, a marked degree of promptness, skill, and fidelity to the interests of your employers.

Yours, very truly, CHAS. MASON.

SWISS DRAWING INSTRUMENTS.—A full stock of these celebrated instruments always on hand. Catalogue, 4th edition, with 250 illustrations of Mathematical, Optical and Philosophical Instruments, and attachment of illustrated sheet representing the Swiss instruments in the actual size and shape, will be delivered, on application, to all parts of the United States, by sending 12 cents in postage stamps. Address C. T. AMSLER, 635 Chestnut st., Philadelphia, Pa.

L. D. JONES & CO., WESTERN PATENT Right and Machinery Exchange, 44 North Second st., St. Louis, Mo. Agents for the purchase, sale, and exhibition of patent rights, patented machinery, &c.

\$500 WILL BE PAID FOR AN ORIGINAL invention in the housekeeping or stationary line. Address, (enclosing stamp for reply) WILLIAM B. MARTIN, New York P. O., Box 4, 633.

THE SUBSCRIBER, HAVING OPENED AN Agricultural Implement and Seed Store, wishes to correspond with all having machines, tools, or furniture to facilitate or economize farm labor or housekeeping for sale. Address A. R. HURST, Box 13, Chambersburg, Pa.

SQUIRE'S SELF-DISCHARGING HORSE RAKE.—Patented December 27, 1854. The most simple, durable, efficient, and only labor-saving rake invented. Rights for sale. Send for a circular. JOHN J. SQUIRE, Bunker Hill, Ill.

FOR TEN CENTS I WILL SEND (POST-paid) the "Mechanic's Guide." For five cents the "Workshop Chart." JOHN PHIN, Rochester, N. Y.

INGERSOLL'S IMPROVED PORTABLE HAY PRESS.—This press combines greater power and portability, requires less labor, occupies less space, and costs less money than any other machine for baling hay ever offered to the public. It is equally convenient for baling cotton, hemp, hops, rags, brown corn, moss, hides, husks, hair, &c. We would call the attention of South American, African, and Indian traders to these presses. They are put up in a very compact portable shape for shipping and transportation. Many of them have already been sent to California, Australia, South America, and the East and West Indies. Circulars, with cuts and full descriptions, will be sent on application (by letter or otherwise) to the FARMERS' MANUFACTURING CO., Green Point, King's co., L. I.

ARTESIAN WELLS.—THE SUBSCRIBER IS engaged in compiling information relating to Artesian Wells, and respectfully requests of parties throughout the United States who have bored, or are boring for water, (or who propose to do so), that they will communicate with him, giving, so far as they are willing, detailed statements of their progress and success, the mode of boring, implements used, strata encountered, depth reached, character, flow and temperature of water, with the amount of labor and expense incurred, difficulties met with or surmounted, and any other item of interest. Parties who make it their business to bore for water or explore for minerals, are requested to furnish their address.

T. H. LEAVITT, No. 1 Change avenue, Boston, Mass.

WOODWORTH PLANERS.—IRON FRAMES, to plane 12 to 24 inches, \$200 to \$310. For sale by S. C. HILLS, 12 Platt street, New York.

\$10,000.—A NEW AND BEAUTIFUL, patentable improved Kaleidoscope, adapted to show fruits, flowers, insects, shells, &c., from the largest bouquet to a single flower, natural or artificial. The whole for sale, or an interest in it. Address THOMAS HODGSON, No. 7 Beach Place, Brooklyn, N. Y.

C. M. CRESSON'S CELLULAR GAS REGULATOR.—Patented October 3, 1854.—adapted to the manufacture of gas from wood, and other vegetable substances, and in use at the Philadelphia Gas Works. Patent rights for sale. For information apply to HENRY S. HAGERT, attorney for patentee, at the south-east corner of Walnut and Sixth sts., Philadelphia, Pa.

WOODWORTH IMPROVED—TWO GOLD Medals have been awarded to me for my patented improvement upon the celebrated Woodworth Planing Machine. The above awards, and the large number of these machines now in operation, fully demonstrate their great superiority over all others. Machines of all sizes constantly for sale.

JAMES A. WOODBURY, 69 Sudbury st., Boston, Mass.

BOILER FLUES.—ALL SIZES, AND ANY length desired, promptly furnished by JAMES O. MORSE & CO., 79 John st., New York.

CLOCKS.—TOWN CLOCKS OF ALL SIZES also Regulators for Jewellers, Railroad Office, &c., believed equal to any made. Dials for illumination. VOSBURGH & CO., Agents, 122 Liberty street, New York. JOHN SHERRY, Manufacturer, Sag Harbor, N. Y.

SWISS DRAWING INSTRUMENTS.—A full stock of these celebrated instruments always on hand. C. T. AMSLER, (formerly Amsler & Wirtz), Philadelphia, Pa.

ENGINEERING.—THE UNDERSIGNED IS prepared to furnish specifications, estimates, plans in general or detail of steamships, steamboats, propellers, high and low pressure engines, boilers and machinery of every description. Broker in steam vessels, machinery, boilers, &c. General Agent for Ashcroft's Steam and Vacuum Gages, Allen & Noyes' Metallic Self-adjusting Conical Packing, Faber's Water Gage, Sewell's Salinometer, Dudgeon's Hydraulic Lifting Press, Roebling's Patent Wire Rope for Hoisting and Steering purposes, Machinery Oil of the most approved kind, &c. CHARLES W. COPELAND, Consulting Engineer, 64 Broadway, New York.

READ—NEW CATALOGUE, (FOURTH EDITION), with two hundred and fifty illustrations of Mathematical, Optical and Philosophical Instruments, and attachment of a large illustrated sheet, representing the Swiss instruments in their actual size and shape, will be delivered, on application, to all parts of the United States, by sending 12 cents in postage stamps or money, which amount will be deducted from the bill, if an order is sent. C. T. AMSLER, No. 635 Chestnut st., Philadelphia, Pa.

MACHINERY.—S. C. HILLS, NO. 12 PLATT street, New York, dealer in Steam Engines, Boilers, Planers, Lathes, Chucks, Drills, Pumps, Mortars, Tenoning, and Sash Machines, Woodworth's and Daniel's Planers, Dick's Punches, Presses and Shears; Cob and Corn Mills; Harrison's Grist Mills; Johnson's Shingle Mills; Belting, Oil, &c.

E. FORBES, ARTIST, 89 NASSAU STREET, New York. Mechanical and General Draughtsman on Wood, Stone, &c.

WROUGHT IRON PIPE—PLAIN AND GALVANIZED, sold at wholesale by JAMES O. MORSE & CO., 79 John st., New York.

STEAM ENGINES, STEAM BOILERS, Steam Pumps, Saw and Grist Mills, Marble Mills, Rice Mills, Quartz Mills for gold quartz, Sugar Mills, Water Wheels, Shafting and Pulleys. The largest assortment of the above in the country, kept constantly on hand by W. M. BURDON, 102 Front street, Brooklyn, N. Y.

HARRISON'S 30 INCH GRAIN MILLS.—Latest Patent.—A supply constantly on hand. Price \$200. Address New Haven Manufacturing Co., New Haven, Conn.

WARP KNITTING LOOMS FOR SALE.—Three or four warp knitting Looms, suitable for weaving Peatfield's double and single Bay State jackets, Garsey frocks, shirts, drawers, and fancy warp-work in general. For particulars, inquire of JAMES FEATFIELD, Ipswich, Mass.

A TREATISE ON THE SALE AND MANAGEMENT OF PATENTS.—Or, How and Where to Sell Patents of Different Kinds; embracing over thirty years' experience of the most successful patent agent in America. Price \$1. CORNWALL BROTHERS, Hartford, Conn.

ALCOTT'S CONCENTRIC LATHE.—THIS Lathe is capable of turning under 2 inches in diameter with only the trouble of changing the die and cutters to the size wanted. It will turn smooth over swells or depressions of  $\frac{1}{4}$  to the inch, and works as smoothly as on a straight line, and does excellent work. Price \$25, (without frames,) boxed, and shipped with directions for setting up. For sale by MUNN & CO., 128 Fulton street, New York City.

SECOND-HAND MACHINISTS' TOOLS.—Consisting of 20 Engine Lathes, 9 Iron Planers, 4 Upright Drills, Hand Lathes, Chuck Lathes, Gear Cutters and Vices, all in good order, and for sale low for cash. For particulars, address FRANKLIN SEINER, 14 Whitney avenue, New Haven, Conn.

STEAM PUMPS, BOILER FEED PUMPS, Stop Valves, Oil Cups, Cocks, Steam and Water Gages, sold by JAMES O. MORSE & CO., No. 79 John street, New York.

MACHINE BELTING, STEAM PACKING, ENGINE HOSE.—The superiority of these articles, manufactured of vulcanized rubber, is established. Every belt will be warranted superior to leather, at one-third less price. The Steam Packing is made in every variety, and warranted to stand 500 degs. of heat. The hose never needs oiling, and is warranted to stand any required pressure; together with all varieties of rubber adapted to mechanical purposes. Directions, prices, &c., can be obtained by mail or otherwise, at our warehouse. NEW YORK BELTING AND PACKING COMPANY, JOHN H. CHEEVER, Treasurer, No. 6 Dey street, New York.

NEW HAVEN MANUFACTURING CO.—Machinists' Tools, Iron Planers, Engine and Hand Lathes, Drills, Bolt Cutters, Gear Cutters, Chucks, &c., on hand and finishing. These tools are of superior quality, and are for sale low for cash or approved paper. For cuts giving full description and prices, address "New Haven Manufacturing Co., New Haven, Conn."

ENGRAVING ON WOOD AND MECHANICAL DRAWING, by RICHARD TEN EYCK, Jr., 128 Fulton street, New York, Engraver to the Scientific American.

WOODWORTH PLANING MACHINES.—Having over \$40,000 worth now completed, I will sell, from this time henceforth, at a very reduced price, and am ready to construct any size on hand at short notice. JOHN H. LESTER, 57 Pearl st., Brooklyn, Long Island.

LAP-WELDED IRON BOILER TUBES.—Prosser's Patent.—Every article necessary to drill the tube-plates and set the tubes in the best manner. THOS. PROSSER & SON, 28 Platt st., New York.

SAWS.—HOE & CO.'S PATENT GROUND SAWS.—Plastering Trowels, &c., can be had, wholesale and retail, at the principal hardware stores, at the salesrooms of the manufacturers, 29 and 31 Gold street, or at the work corner of Broome, Sheriff and Columbia sts., New York. Illustrated catalogues, containing prices and information interesting to sawyers generally, will be sent by post on application.

LIME.—PAGE'S PERPETUAL KILN.—Patented July, 1857. Superior to any in use for wood or coal. 25 cords of wood, or 14 tons of coal to 100 lbs. of lime mixed with stone. Address C. D. PAGE, Rochester, N. Y.

WELCH & GRIFFITHS—ESTABLISHED 1830—Manufacturers of Improved Patent Ground and Warranted Extra Fine Cast Steel Saws, of the various kinds now in use in the different sections of the United States and the Canadas, and consisting of the celebrated Circular Saw, Graduated Cross Cut and Tenon, Gang, Mill, Pit, Segment, Billet and Felloe Saws, &c., &c. For sale at their warehouse, No. 48 Congress street, Boston, Mass.

OIL! OIL! OIL!—FOR RAILROADS, STEAMERS, and for machinery and burning. Pease's Improved Machinery and Burning Oil will save fifty per cent, and will not gum. This oil possesses qualities vitally essential for lubricating and burning, and found in no other oil. It is offered to the public upon the most reliable, thorough and practical test. Our most skillful engineers and machinists pronounce it superior and cheaper than any other, and the only oil that is in all cases reliable and will not gum. The Scientific American, after several tests, pronounced it "superior to any other they have ever used for machinery." For sale only by the inventor and manufacturer, F. R. PEASE, 61 Main st., Buffalo, N. Y. N. B.—Reliable orders filled for any part of the United States and Europe.

EXCELSIOR STEAM PUMPS, DIRECT and Double-Acting, manufactured and sold at 55 and 57 First st., Williamsburgh, N. Y., and 301 Pearl st., New York. May be seen in operation at J. O. Morse & Co., 79 John st., New York.

GUILD, GARRISON & CO.

MAIL'S SPEEDWELL IRON WORKS, Morristown, N. J., manufacture Craig's Patent Double-acting Balance Valve Oscillating Steam Engines both stationary and portable, Knowles' Patent Muley, Portable, Gang and Re-sawing Mills, Sugar and Chinese Cane Mills and Sugar Pans, Grist Mills, Mill Irons, Rice Water-wheels, Forgings and Castings. Orders for the above, and all descriptions of labor-saving machinery will receive prompt attention.

JOHN H. LIDGERWOOD & CO., No. 9 Gold street, New York.





The laws which govern the motion of bodies are capable of many pleasing illustrations, and the example which we now give of causing rotary motion is very interesting and easily performed. Take a piece of card and cut out a little figure like that in the engraving and paste or gum it in an erect position on the inside of a watch-glass, A. Then procure a black japanned waiter, B, or a clean plate will do, and holding it in an inclined position, place the figure and watch-glass on it, and they will of course slide down. Next let fall a drop of water on the waiter, place the watch



glass on it, and again incline the waiter, and instead of the watch-glass sliding down, it will begin to revolve. It will continue to revolve with increasing velocity, obeying the inclination and position of the plane, as directed by the hand of the experimentalist. The reason of this is, in the first place, in consequence of the cohesion of the water to the two surfaces, a new force is introduced by which an unequal degree of resistance is imparted to different parts of the watch-glass in contact with the waiter, and consequently, in its effort to slide down, it revolves. Again, if the drop of water be observed, it will be seen that it undergoes a change of figure; a film of water by capillary action, is drawn to the foremost portion of the glass, while by the centrifugal force, a body of water is thrown under the hinder part of it. The effect of both these actions is to accelerate the motion, or in other words, to gradually increase the speed.

Who has not had a ride on a see-saw, aye, and who has not enjoyed it, too? Everybody of course, and well we remember in our see-sawing days how we always used to try and get some one heavier than ourselves to join us in the sport, because then we had a better ride. In those days we never inquired why, or wanted to know the cause, but even children are wiser now than they were then, and as we know that boys and girls still like a good ride on a see-saw, we will explain the reason why the lightest boy always has the biggest ride.




The see-saw is a plank laid across another, and is nothing but a lever, and when two boys of unequal weights intend to have a ride together, the plank has to be adjusted so that the lightest has the longest end, as seen in our engraving. When they commence to move up and down, they each move in an arc of a circle, the plank forming the radius and the supporter the center. The circles in which

they move are drawn around them, and as the lightest boy has the longest radius, he describes an arc of a larger circle than the heavier one, and so has the best ride—that is, he goes through a greater space in the same time.

#### Custer's Improved Lubricator.

The necessity of having some means whereby oil or other lubricating material can be introduced into steam cylinders, steam chests, and other places where the pressure inside is much greater than the external pressure, is very obvious; and it is also easy to conceive that none of the ordinary oil cups will answer, as should one of these be placed on the cylinder, the steam would blow all the oil out of the cup instead of allowing any to pass into the cylinder. In the early history of the steam engine it was common to force oil into such places by means of a common syringe, but this was uncertain, and besides wasted a great amount of oil, and now it is usual to employ an oil cup constructed specially for this purpose.

J. D. Custer, of Norristown, Pa., has invented a lubricator which will effect this object, (and of which our engraving is a vertical section,) whose several parts we will now de-

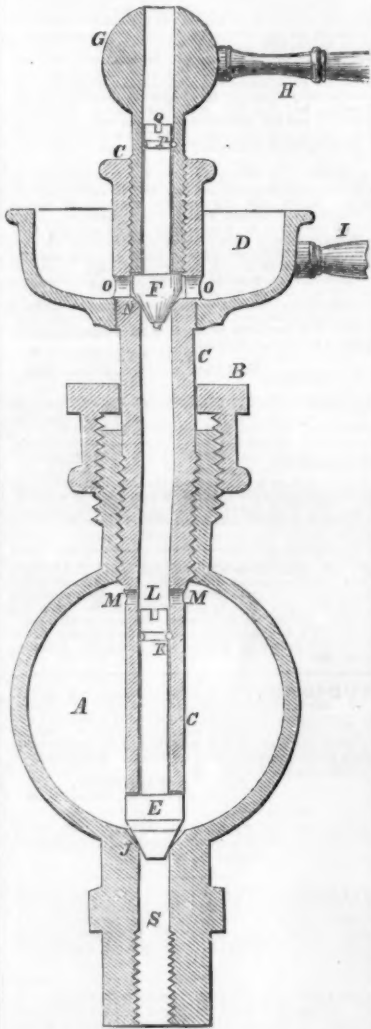

A is a globular-shaped chamber, having the lower end cast as usual to tap into the lid of the steam chest, and provided with a hole, S, and the valve seat, J, is cut at the mouth of this hole, and in line with the vertical stem, C C C. The upper end of A has a hole in it so as to receive the vertical stem, C, and it has a screw cut outside to receive the stuffing-box, B; by this box, B, the packing can be screwed tight on the branch of A, and around, C, so as to make it steam and oil tight, the screw on C being cut so low down, that when it is raised to open E, it will not cut the packing. The cylindrical stem, C, is hollow, being wider from the top to N than from N to E, so that a seat is given to the valve, F; it has two holes, O O, just above, N, opening into the oil cup, or basin, D, through which oil can pass into the stem, and through two other oil holes, M M, into the globe, A. The valve, E,

is kept in its place by a groove turned in its stem into which a side pin is fitted at K, and at L it has a screw-driver notch cut in the top, so that it may be ground to its seat by a screw-driver reaching down when the screw, G, is removed. The valve, F, is attached to G in the same manner, having a side pin, P, and notch, Q; it also has a handle, H. The cup, D, is riveted to the stem, C, and has a handle, I.

The operation is as follows:—When the whole is screwed into the lid of the steam chest so as not to leak, and the gum rings placed in the stuffing-box, B, then close, E, by turning the handle, I, put on the steam, and open the valve, F, by turning the handle, H, pour the oil into the cup, D, it passes through the holes, O O, shut the air valve, if one is used, and valve, F, and open the lower valve, E, the steam then fills the globe, and the oil enters the cylinder.

This is a very neat invention, and a patent was obtained for it March 24, 1857, by the inventor, who will give any further information on being addressed as above.

#### Improvements in the Necks of Bottles.

There have been several inventions made for more effectually securing the corks and stoppers of bottles; the one now before us is for corks only, and is of an extremely simple character. The only alteration required is in the bottle, the neck of which on the inside for about three-quarters of an inch from the mouth has to be made with an internal screw; and this, of course, has to be done at the time the bottles are manufactured. This plan would not prevent those who use large quan-



tities of bottles from adopting them, as a mixed stock of plain and screwed necked might be kept, and even mixed together without any inconvenience. The same cork that would fit the one would do for the other, and the improved screw neck bottles could be handled with greater rapidity, providing the corks were sufficiently good to stand the twist which is required to securely fix them. The advantages which this plan has over the old one are that the squeezers and mallet are dispensed with, and the certainty of the cork retaining its position when once fixed. As the screw is formed rather taper, the smallest end being downwards, every twist or half twist given to the cork reduces the diameter of it, and throws a greater pressure on the neck of the bottle. As the cork enters, an external thread is formed upon it, fitting the internal thread of the neck, so that if the cork is good, a great amount of pressure would have to be exerted before it could be forced out. Another advantage in this arrangement is, that no wire is needed to secure the cork, as it must take a spiral direction before it can be withdrawn or forced out.

A patent for forming screws in the necks

of bottles has recently been taken out at the British Patent Office, by Mr. Simpson, of Reigate, England. The means by which this is effected is by an instrument something like the tongs or shears used for forming the ordinary necks of bottles. To the ends of the jaws of these tongs are secured two pieces of metal, which are shaped to form the exterior of the neck of the bottle or vessel to be made. In the center is fitted a rod, the lower end of which passes between the jaws of the clip. The lower end of this is made conical, and formed with a thread upon it. The upper end passes through the lower part of the spring clip, and terminates in a cross handle. The melted glass is placed on the central rod to form the neck, and the jaws of the clip brought together to form the exterior, and press the glass into the thread of the screw. The metal screw is withdrawn by means of the cross handle at the top of the rod, when the glass is cool, leaving a screw or thread formed inside of the neck of the bottle.

For medicine bottles, where the cork has to be frequently removed and replaced, this invention appears to be of the utmost value. It is one of those simple appliances which must find favor with the public, as it will save much time, waste and trouble, at a very small cost above what is now paid. As it compresses the cork much more than the ordinary bottles, it will prevent much evaporation, and so in some measure supersede glass stoppers.

We transcribe the above from an English periodical, entitled the *Illustrated Inventor*.



INVENTORS, MANUFACTURERS,  
AND FARMERS.

THIRTEENTH YEAR!

PROSPECTUS OF THE  
SCIENTIFIC AMERICAN.

This work differs materially from other publications, being an Illustrated Periodical, devoted to the promulgation of information relating to the various MECHANICAL and CHEMICAL ARTS, MANUFACTURES, AGRICULTURE, PATENTS, INVENTIONS, ENGINEERING, MILL WORK, and all interests which the light of PRACTICAL SCIENCE is calculated to advance.

Every number of the SCIENTIFIC AMERICAN contains eight pages of reading matter, abundantly illustrated with from five to eight ENGRAVINGS—all of which are expressly engraved for this publication.

All the most valuable patented discoveries are delineated and described in its issues, so that, as respects inventions, it may be justly regarded as an *Illustrated Repository*, where the inventor may learn what has been done before him in the same field which he is exploring and where he may bring to the world a knowledge of his own achievements.

Reports of American Patents granted are also published every week, including Official Copies of all the PATENT CLAIMS. These Patent Claims are furnished from the Patent Office Records expressly for this paper, and published in the SCIENTIFIC AMERICAN in advance of all other publications.

Mechanics, Inventors, Engineers, Chemists, Manufacturers, Agriculturists, and people in every profession of life, will find the SCIENTIFIC AMERICAN to be of great value in their respective callings. Its counsels and suggestions will save them hundreds of dollars annually, besides affording them a continual source of knowledge, the value of which is beyond pecuniary estimate. Much might be added to this Prospectus, to prove that the SCIENTIFIC AMERICAN is a publication which every Inventor, Mechanic, Artisan, and Engineer in the United States should patronize; but the publication is so thoroughly known throughout the country that we refrain from occupying further space.

TERMS OF SUBSCRIPTION—Two Dollars a Year, or One Dollar for Six Months.

Southern, Western and Canadian money or Post Office stamps, taken at par for subscriptions. Canadian subscribers will please to remit twenty-six cents extra on each year's subscription, to prepay postage.

#### CLUB RATES.

Five Copies, for Six Months.....	\$4
Ten Copies, for Six Months.....	\$8
Ten Copies, for Twelve Months.....	\$15
Fifteen Copies, for Twelve Months.....	\$22
Twenty Copies, for Twelve Months.....	\$28

For all clubs of Twenty and over, the yearly subscription is only \$1 40. Specimen copies will be sent gratis to any part of the country.

MUNN & CO., Publishers and Patent Agents,  
No. 128 Fulton street, New York.